

HFM Front Mount Pump

750 - 1500 GPM (2850 - 5678 LPM)



FRONT MOUNT PUMPS

The Single-Stage Technology Leader

Built Tough. Built To Last. Built To Meet Your Needs.

The Closer You Look... the more you will appreciate our quality and design. Because we build our pumps with nothing but the finest materials and components, assembled as only the most experienced craftsman know how.

Hale Front Mounts provide pump-and-roll capability with full NFPA 1901 compliance. They have single-stage design for ease of operation. Best of all, they're built by Hale.

For pump-and-roll grass fire fighting or drafting from ponds and streams, there are no pumps like Hale Front Mounts. They are extremely rugged, with a range of capacities to meet your needs. And they are built with the same unique design features that have made Hale the leader in the fire-fighting industry.

Maintenance free mechanical seal eliminates pump packing adjustments and maintenance

High quality fine grain bronze impeller

Oversized relief valve with pressure control valve and light

Corrosion resistant stainless steel pump shaft


One Piece Pump Volute

Very compact design

STANDARD FEATURES

- Bronze impeller, individually balanced and matched with renewable bronze clearance rings.
- Electric rotary vane, positive displacement priming system with single panel control activation.
- Stainless steel ball-type "droop" discharge valves with self-locking handle feature to gate valve in any position.
- Oversized deep-groove ball bearings for maximum efficiency and long life.
- Other standard features include chrome-plated discharge and suction caps, speed counter connection and throttle indicator lights.

Hale pumps go where the action is. And when they get there, they deliver. That's why more firefighters around the world rely on Hale Front Mount Pumps.

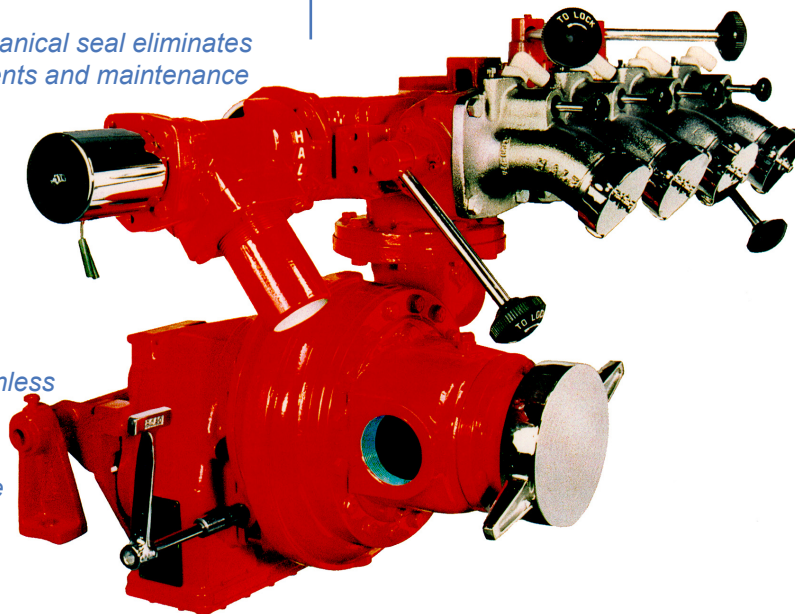

Hale Products Inc. • 700 Spring Mill Avenue • Conshohocken PA 19428
Phone: (610) 825-6300 • Fax: (610) 825-6440 • 800-220-4823 • www.haleproducts.com
Class 1 • 607 NW 27th Avenue • Ocala, FL 34475 • Phone: (352) 629-5020
Fax: (352) 629-2902 • 800-533-3569 • www.class1.com

Bulletin #482, Rev 5, 6/05 • Copyright 2005 Hale Products Inc. Note: Hale Products Inc. cannot assume responsibility for product failure resulting from improper maintenance or operation. Hale is responsible only to the limits stated in the product warranty. Product specifications contained in this material are subject to change without notice.

