

PFP-13HPHND-FL

FLOATING PUMP

This high volume Honda powered floating pump is the most efficient on the market. It gives you the highest volume in its range.



ENGINE SPECIFICATIONS

- GXV 390 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start
- 2.2 quarts (2.1 l) integrated fuel tank


PUMP UNIT SPECIFICATIONS

- Direct drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Self priming system
- One 2 1/2" (65 mm) delivery outlet
- One 3" (77 mm) suction inlet floater
- Light weight heavy duty floater
- Dimensions: Length: 32 1/4" (819 mm); Width: 30" (762 mm); Height: 22 1/8" (561 mm)
- Weight: 125 bs (57 kg)



PERFORMANCE

MAX FLOW : 460 GPM **210 GPM @ 46 PSI**
MAX PRESSURE : 75 PSI **185 GPM @ 50 PSI**
450 GPM @ 20 PSI **115 GPM @ 65 PSI**

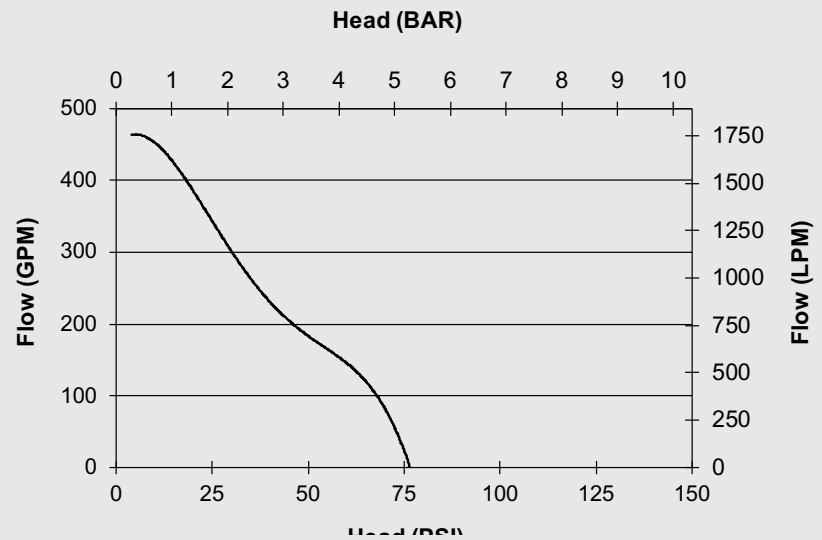

FLOATER

Light weight heavy duty polyethylene floater

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pump.com