

# PFP-14HPKHL-EM-1D

## HIGH VOLUME PUMP-FIRE PUMP

*This pump is the ideal tool to fill your fire apparatus, supply your apparatus or carry water over a long distance.*



## ENGINE SPECIFICATIONS

- CH440 Kohler air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.8 gallon (7 l) integrated fuel tank
- 10 amp. charging system

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump, direct drive
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 2 1/2" (65 mm) NST delivery outlets with 1/4-turn ball valve
- One 4" (100 mm) NST suction inlet
- Dimensions: Length: 27" (685 mm); Width: 20.5" (520 mm); Height: 19.5" (495 mm).
- Wet Weight: 176 lbs (80 kg)


## INCLUDED ACCESSORIES

- Pressure gauge
- Full roll cage

## PERFORMANCE

**375 GPM @ 5 PSI**  
**350 GPM @ 10 PSI**  
**300 GPM @ 25 PSI**

**200 GPM @ 50 PSI**  
**90 GPM @ 75 PSI**

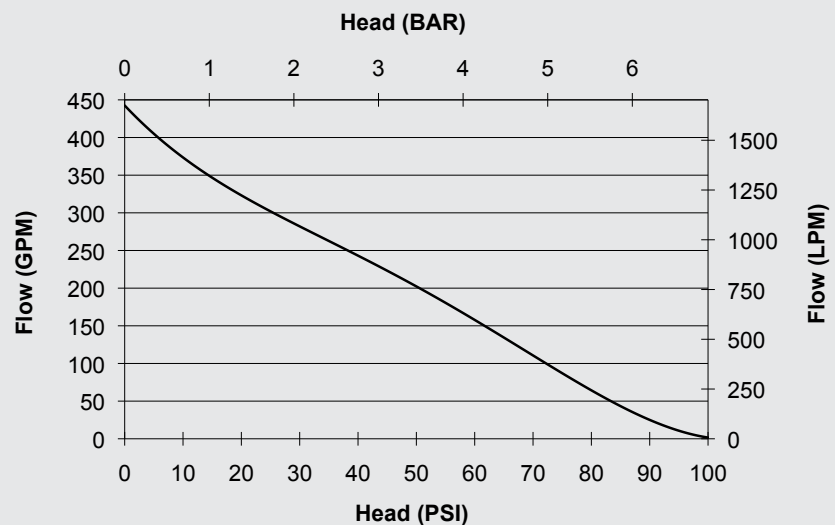

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)