


PFP-14HPKHL-M-1D

HIGH VOLUME PUMP-FIRE PUMP

This pump is the ideal tool to fill your fire apparatus, supply your apparatus or carry water over a long distance.

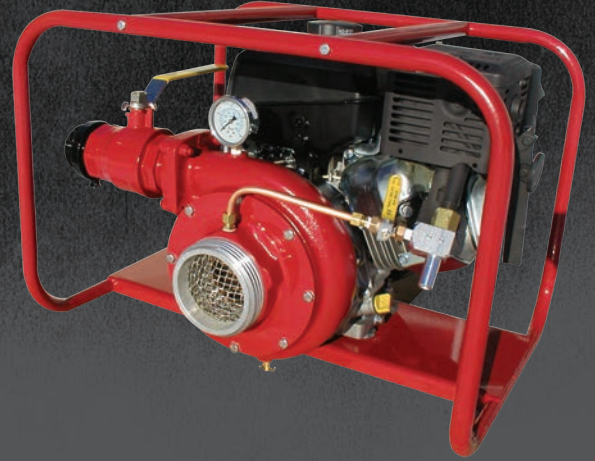

ENGINE SPECIFICATIONS

- CH440 Kohler air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start
- 1.8 gallon (7 l) integrated fuel tank
- No charging system

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump, direct drive
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 2 1/2" (65 mm) NST delivery outlets with 1/4-turn ball valve
- One 4" (100 mm) NST suction inlet
- Dimensions: Length: 27" (685 mm); Width: 20.5" (520 mm); Height: 19.5" (495 mm).
- Wet Weight: 155 lbs (77.5 kg)


INCLUDED ACCESSORIES

- Pressure gauge
- Full roll cage

PERFORMANCE

375 GPM @ 5 PSI
350 GPM @ 10 PSI
300 GPM @ 25 PSI

200 GPM @ 50 PSI
90 GPM @ 75 PSI

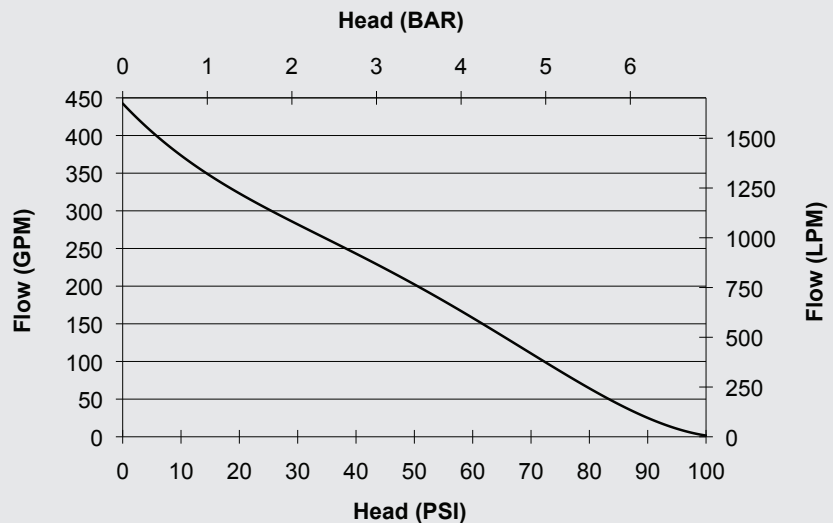

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pump.com