

PFP-6HPVGD-M-TWIN

BRIGGS & STRATTON POWERED PUMP

The Goliath model is a compact pump that delivers amazing pressure performance so as to meet the needs of several applications.

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 130000, air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start
- 0.8 gallon (3.1 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. dual stage centrifugal pump
- Pump body made from aluminum
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1" (25 mm) delivery outlets and one 1 1/2" (38 mm) NPSH delivery outlet
- One 1 1/2" (38 mm) NPSH suction inlet
- Dimensions: Length: 24-1/2" (622 mm); Width: 16" (406 mm); Height: 17" (432 mm)
- Wet weight: 79 lbs (36 Kg)


INCLUDED ACCESSORIES

- Low oil level shut-off sensor

PERFORMANCE

MAX FLOW: 65 GPM
MAX PRESSURE: 130 PSI
60 GPM @ 10 PSI

55 GPM @ 50 PSI
40 GPM @ 100 PSI
25 GPM @ 125 PSI

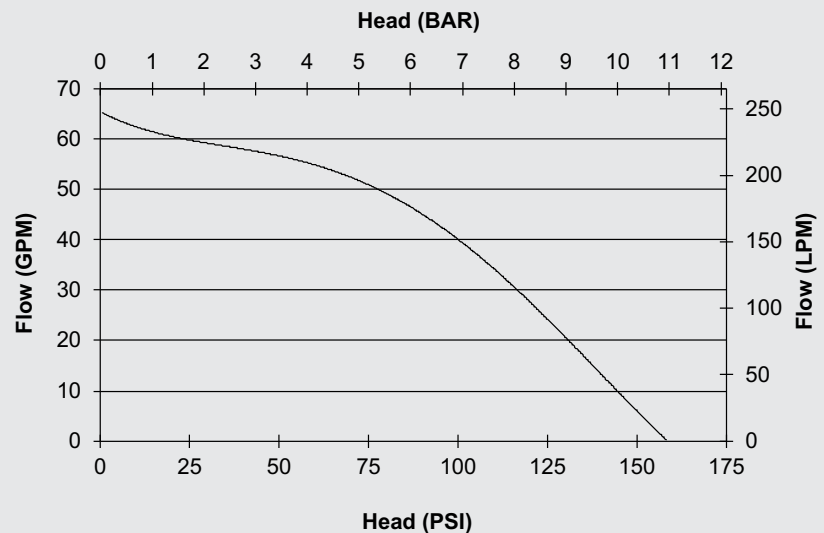

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pump.com