


MODEL H 3 360

MODEL H 4 360

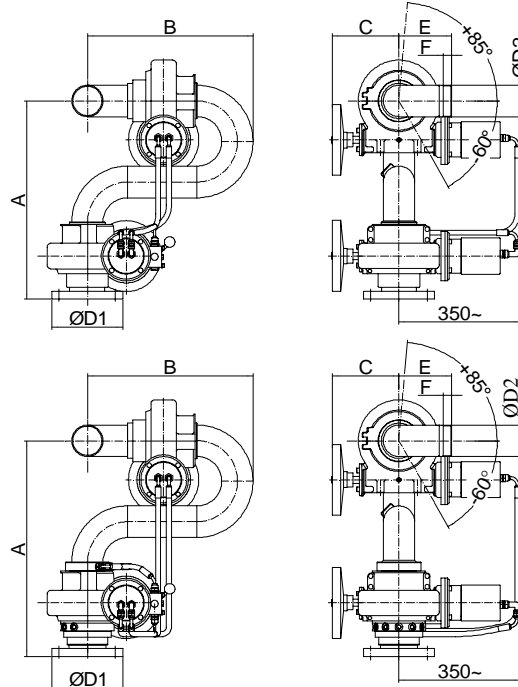

Dimensions in mm

CONSTRUCTION FEATURES

Body material: stainless steel AISI 316

Protection gear case material: aluminium

Joints material: stainless steel AISI 316, phosphor bronze balls mounted with greasers

UNI/DIN or ANSI flange material: carbon steel

Design pressure: 16 bar

Minimum working pressure: 2,5 bar

Maximum working pressure (advised): 12 bar

Rotation angle: 360° continuous

Rotation speed: 8°/sec (variable)

Required oil flow: 3 litres/minute

Required oil pressure: 60 bar +/- 10 bar

Horizontal and vertical movements driven by reduction gear hydraulic motor with end stroke safety clutch

Finish: red epoxy paint (RAL 3000)

OPTIONAL

Different elevation and rotation angles

Inlet flange material: stainless steel AISI 316

Different inlet flange sizes

Safety hand wheel

By-pass for manually operated override with hand-wheel

Hydraulic and/or functional test witnessed

MODEL	Ø BODY SIZE	A	B	C	ØD1	ØD2 BSP	E	F	MAX FLOW RATE	WEIGHT
H 3	3"	600 mm	455 mm	210 mm	3"	3"	150 mm	23 mm	4000 l/min	60 kg
H 3 360	3"	610 mm	455 mm	210 mm	3"	3"	150 mm	23 mm	4000 l/min	70 kg
H 4	4"	710 mm	545 mm	210 mm	4"	4"	200 mm	25 mm	7000 l/min	65 kg
H 4 360	4"	760 mm	545 mm	210 mm	4"	4"	200 mm	25 mm	7000 l/min	75 kg