

FlexVu® Explosion-Proof Universal Display Unit Model UD10 DCU Emulator



DESCRIPTION

The FlexVu® Model UD10 DCU Emulator (UD10-DCU) is designed for applications that require a gas detector with digital readout of detected gas levels. Its LON interface board makes the UD10-DCU compatible with Eagle Quantum Premier systems by digitizing the 4-20 mA analog signal from the attached sensor/transmitter and transmitting the value as a process variable over the LON to the EQP controller.

The UD10-DCU is designed for use with Det-Tronics gas detectors such as GT3000, PIR9400, PIRECL, OPECL, C706x*, Model 505/CGS, CGS** or NTMOS, as well as generic linear 4-20 mA sensors. Gas concentration and unit of measurement are indicated on a digital display.

All electronics are enclosed in an explosion-proof aluminum or stainless steel housing. The display unit is used with a single detector that may be either coupled directly to the UD10-DCU, or remotely located using a sensor termination box. The UD10 features non-intrusive calibration. A magnet is used to perform calibration as well as to navigate the UD10-DCU's internal menu.

The UD10-DCU Universal Display can be used with various 4-20 mA gas detection devices, with or without HART. The unit provides display, output and control capabilities for the gas detector.

The UD10-DCU utilizes the following I/O:

Signal Inputs:	4-20 mA loop from the sensing device
User Inputs:	Magnetic switches (4) on the display panel S ³ Software
Signal Outputs:	LON communication
Visible Outputs:	Backlit LCD display Computer running S ³ Software.

FEATURES AND BENEFITS

- Universal design supports multiple Det-Tronics sensors or generic linear 4-20 mA sensors.
- Local digital LCD display continuously indicates gas level, gas type, and units measured.
- Backlit and heated display.
- Non-intrusive calibration quickly performed by one person.
- Rugged construction approved for use in classified hazardous areas.
- Compatible with Eagle Quantum Premier systems.
- Non-intrusive menu allows device configuration without de-classifying the hazardous area.
- Internal magnetic switches provide a non-intrusive user interface.
- Smart capabilities with access to sensor information and measurement range.
- Event logs: Calibration with date and time stamp.
- Fault logs: Detector fault, Low power and General fault.
- Alarm logs: High gas alarm, Low gas alarm and Aux alarm.

* C7065E O₂ detector is not supported.

** Requires the use of a CGS Interface Board. See Instruction Manual 95-8656 for details.

SPECIFICATIONS

Operating Voltage 24 Vdc nominal, operating range is 18 to 30 Vdc.

Operating Power Heater off: 1.3 watts nominal @ 24 Vdc with backlit display off.
2 watts @ 24 Vdc with backlit display on.
Heater on: 4 watts additional.
CGS model: Add 4 watts with CGS interface board and CGS sensor installed.
Maximum power with heater and backlit display on:
6 watts @ 30 Vdc (Standard model)
10 watts @ 30 Vdc (CGS model).
NOTE: – Heater turns on when the internal temperature drops below –10°C.

LON Communication Digital communication, transformer isolated (78.5 kbps).

EQP/UD10 System Accuracy <1 ppm error.
<1 %LFL error.
With CGS sensor: ±3 %LFL, 0-50 range,
±5 %LFL 51-100 range.

EQP/UD10 System Response Toxic gas: T90 < 10 sec.
Combustible gas: T90 < 10 sec.
With CGS sensor: T90 < 12 sec.

Unit of Measurement PPM, % LFL, % V/V, LFLM, or Mg/M3.

Operating Temperature –40°C to +75°C.

Storage Temperature –55°C to +75°C.

Humidity Range 5 to 95% RH (Det-Tronics verified).

Wiring Terminals 14 to 18 AWG wire can be used.

Conduit Entries 3/4" NPT or M25.


Enclosure Material Epoxy coated aluminum or 316 stainless steel.

Shipping Weight Aluminum: 4.15 pounds (1.88 kilograms).
Stainless Steel: 10.5 pounds (4.76 kilograms).

Warranty 12 months from date of installation or 18 months from date of shipment, whichever occurs first.

Electro-Magnetic Compatibility EMC Directive 2004/108/EC
EN55011 (Emissions)
EN50270 (Immunity).

Dimensions Dimensions shown in inches (centimeters).

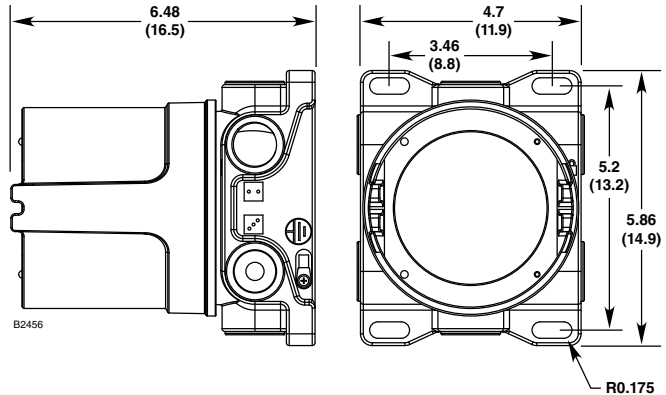

Certification



FM: Class I, Div. 1, Groups B, C & D (T5);
Class I, Div. 2, Groups B, C & D (T4);
Class I, Zone 1/2 AEx d IIC (T5);
Class II/III, Div. 1/2, Groups E, F & G.
Tamb –40°C to +75°C
NEMA/Type 4X, IP66
Conduit seal not required.

Performance verified in accordance with:
ANSI/ISA-92.00.01
ANSI/ISA-12.13.01 (CGS excluded)
FM 6310/6320
ANSI/ISA-12.13.04/FM 6325

CSA: CSA 08 2029512.
Class I, Div. 1, Groups B, C & D (T5);
Class I, Div. 2, Groups B, C & D (T4);
Class II/III, Div. 1/2, Groups E, F & G.
(Tamb = –40°C to +75°C)
Type 4X
Conduit seal not required.
Performance verified in accordance with:
CSA C22.2 #152.

ATEX: Ex 0539 Ex II 2 G
Ex d IIC T5
Tamb –40°C to +75°C
FM08ATEX0042X
IP66
Performance verified in accordance with:
EN 60079-29-1 and EN 50241-1-2.

IECEX: Ex d IIC T5
Tamb –40°C to +75°C
IECEX FMG 08.0010X
IP66
Performance verified in accordance with:
IEC 60079-29-1.



Refer to Instruction Manual 95-8656 for in-depth information regarding the FlexVu UD10-DCU Universal Display Unit.

Specifications subject to change without notice.

Det-Tronics, the DET-TRONICS logo, and FlexVu are registered trademarks or trademarks of Detector Electronics Corporation in the United States, other countries, or both. Other company, product, or service names may be trademarks or service marks of others.

©Copyright Detector Electronics Corporation 2012. All rights reserved.



Detector Electronics Corporation

6901 West 110th Street • Minneapolis, Minnesota 55438 USA
Operator: (952) 941-5665 or (800) 765-FIRE
Customer Service: (952) 946-6491 • Fax (952) 829-8750
<http://www.det-tronics.com> • E-mail: det-tronics@det-tronics.com