

# HANDLINE NOZZLES



SOLID STRIKE™

HANDLINE NOZZLES


## Solid Strike™

The Solid Strike™ offers unsurpassed flow performance with flexibility that allows the nozzleman to vary GPM or reach without shutting down to change tip size. Unlike a traditional smooth bore tip, the Solid Strike™ utilizes the hydraulic forces of the water flow itself to converge and project a perfect solid stream of water at near identical exit velocity — maximizing the stable range of the stream. The Solid Strike™ operates like any traditional smooth bore tip on a shut-off, except that the nozzleman has the ability to vary the effective tip size under flow.

Features include:

- Dual construction free swivel/swivel for superior inlet movement and rotation
- Hard anodized, Teflon® impregnated aluminum alloy body and pistol grip
- Aluminum/bronze shut-off handle
- Delrin® adjustable hydrofoil
- Maximum operating pressure 200 psi

1-23

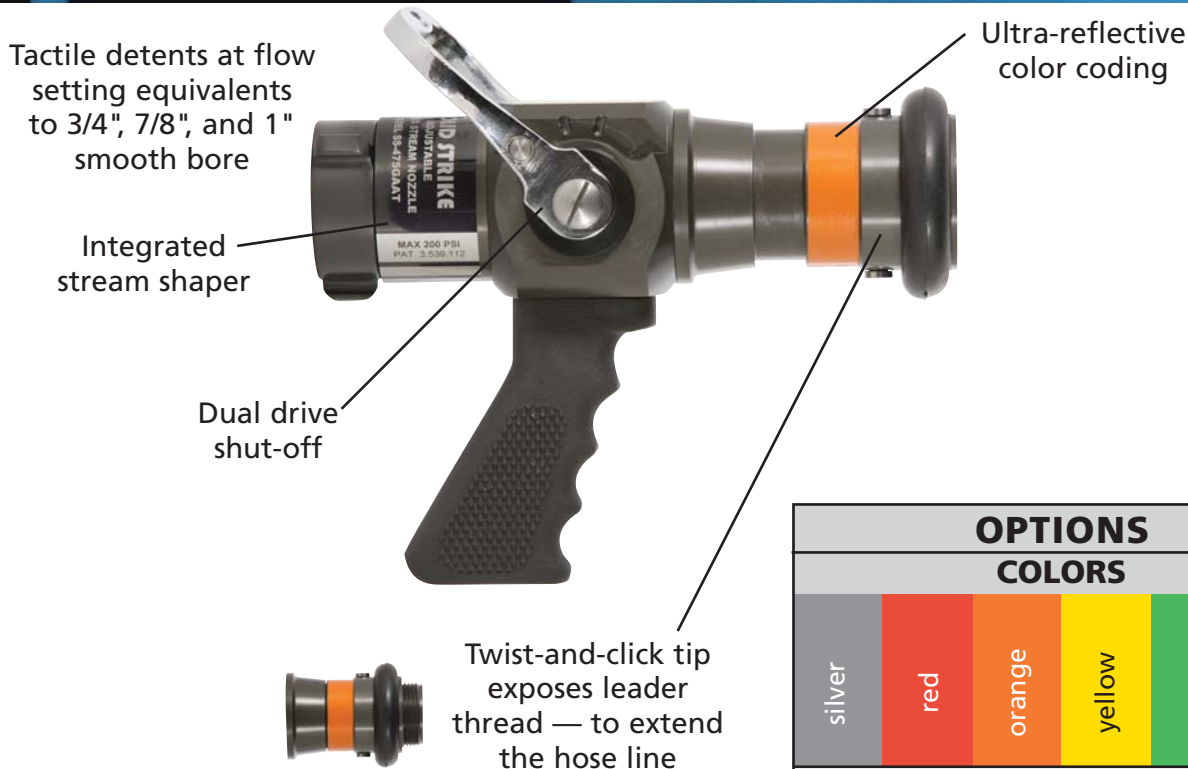

OPTIONS					
COLORS					
silver	red	orange	yellow	green	blue
<p><i>Solid Strike® nozzle comes standard with chrome handle and natural Elk-O-Lite® pistol grip. Ultra-reflective, durable vinyl color coding bands are supplied with each nozzle. See above for colors.</i></p>					
THREADS					
<p><i>All nozzles are NHT unless otherwise specified. See index T-12 for optional base threads, including British instantaneous.</i></p>					

INLET SIZE	OUTLET SIZE	FLOW RATES*	HANDLE	MODEL
		GPM (LPM)	Horseshoe	
1.5"	1.5"	118/159/209 (447/602/791)	s	SS-475-GAAT

\* Flow rate for each detent (3/4", 7/8", and 1") setting @ 50 psi (3.45 bar)