



# G-Force Multiforce 500 Pulsing

G- Force Nozzles: simplicity & safety

---

## Automatic nozzle – 500 l/min with Emergency setting 2 selectable flows

- Large ring for flow-rate selection: pulsing 250, Auto 500 l/min, Safety & Flush
- Wide flow handle easily manoeuvrable for instant reaction
- Powerful full cone spray for smothering flames.
- Flush during operation on selector ring
- Unbreakable teeth; Maintenance unnecessary
- Hard anodised aluminium.
- Strainer to prevent large debris ingress.
- Compliant with EN15182-2 type 4.2.
- Patent Pending



- Pulsing position : micro droplets immediately on valve opening
- 2 selectable maximum flows
- Low pressure setting for safety and high-rise application
- Slide valve for keeping perfect stream quality
- Shock absorber in the bumper



Grips available in several colours

## G-Force: Mach3 & Quadrafog advantages combined in the Multiforce 500 :

### - Mach3 Automatic Advantages:

- Mach3 quality :vulcanized bumper, hard anodized aluminium ...
- Slide valve for instant reflex
- Optimum Flow
- Reduced water hammer
- Strainer

### - Quadrafog Advantages:

- Selectable flow-rates (for preserving water)
- Flush on selector ring
- Wide opening on Emergency setting
- Stream quality and fog pattern




### Innovations:

- Shock absorber
- Spray pattern removable lock (optional)
- Easy customization
- New Foam adaptor fixing



### Flow / Pressure curves - Multiforce 500 Pulsing @ 6 bar:

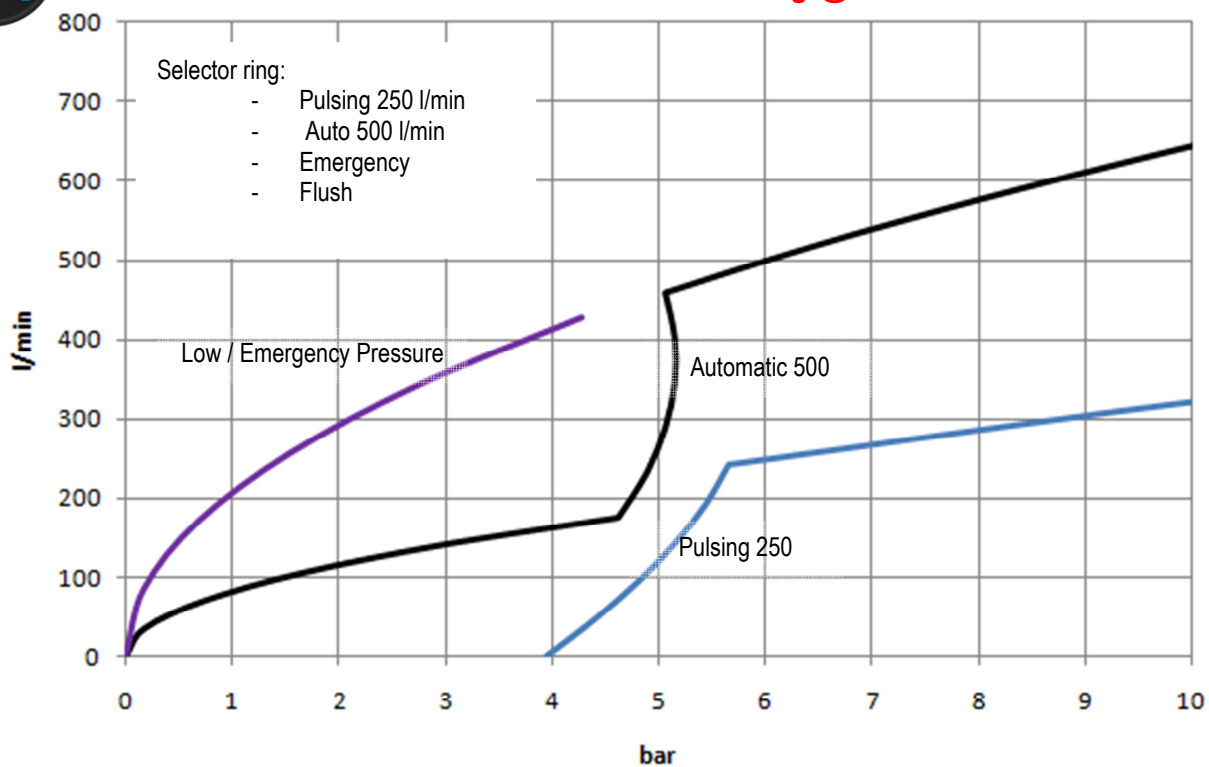

### REDUCED COST OF OWNERSHIP:

Very light maintenance requirement due to the nozzle design and materials used.



Multiforce 500-ZF01.129.EN.1



As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice