



# G-Force Multimatic 500 Pulsing

G- Force Nozzles: simplicity & safety

---

## Automatic nozzle – 500 l/min With Mid-Flow setting

- Large ring for flow-rate selection: pulsing 250, Auto 500 l/min & Flush.
- Wide flow handle easily manoeuvrable for instant reaction
- Powerful full cone spray for smothering flames.
- Flush during operation on selector ring
- Unbreakable teeth; Maintenance unnecessary
- Hard anodised aluminium.
- Strainer to prevent large debris ingress.
- Compliant with EN15182-2 type 4.2
- Patent Pending



Grips available in several colours



- Pulsing position : micro droplets immediately on valve opening
- Automatic with Mid-flow setting
- Slide valve for keeping perfect stream quality
- Shock absorber in the bumper

## G-Force: Mach3 & Quadrafog advantages combined in the Multimatic 500 :

### - Mach3 Automatic Advantages:

- Mach3 quality :vulcanized bumper, hard anodized aluminium ...
- Slide valve for instant reflex
- Optimum Flow
- Reduced water hammer
- Strainer

### - Quadrafog Advantages:

- Selectable mid-flow (for preserving water)
- Flush on selector ring
- Stream quality and fog pattern




### Innovations:

- Shock absorber
- Spray pattern removable lock (optional)
- Easy customization
- New Foam adaptor fixing



### Flow / Pressure curves - Multimatic 500 Pulsing @ 6 bar:

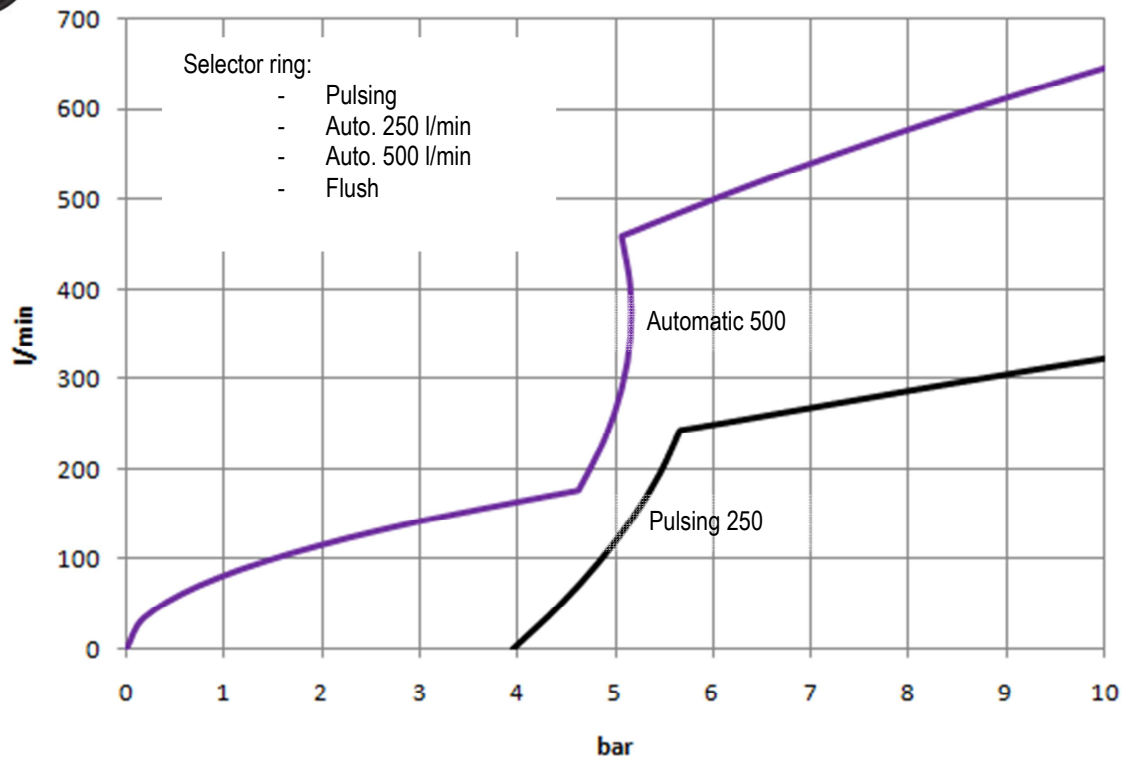

### REDUCED COST OF OWNERSHIP:

Very light maintenance requirement due to the nozzle design and materials used.



Multimatic 500-ZF01.128.EN.1

As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice