



# G-Force Ultiforce 500 Pulsing

G- Force Nozzles: simplicity & safety

---

## Automatic nozzle – 500 l/min with emergency setting

- **Large ring for flow-rate selection:** Pulsing 500 l/min, Emergency & Flush
- **Wide flow handle** easily manoeuvrable for instant reaction
- **Powerful full cone spray** for smothering flames.
- **Flush** during operation on selector ring
- Unbreakable teeth ; **Maintenance unnecessary**
- Hard anodised aluminium.
- Strainer to prevent large debris ingress.
- Compliant with EN15182-2
- Patent Pending



- **Pulsing position :** micro droplets immediately on valve opening
- **Low pressure setting** for Emergency use
- **Slide valve** for keeping perfect stream quality
- **Shock absorber** in the bumper



Grips available in several colours

## G-Force: Mach3 & Quadrafog advantages combined in the Ultiforce 500 :

### - Mach3 Automatic Advantages:

- Mach3 quality :vulcanized bumper, hard anodized aluminium ...
- Slide valve for instant reflex
- Optimum Flow
- Reduced water hammer
- Strainer

### - Quadrafog Advantages:

- Flush on selector ring
- Wide opening on Emergency setting
- Stream quality and fog pattern




### Innovations:

- Shock absorber
- Spray pattern removable lock (optional)
- Easy customization
- New Foam adaptor fixing



### Flow / Pressure curves - Ultiforce 500 Pulsing @ 6 bar:

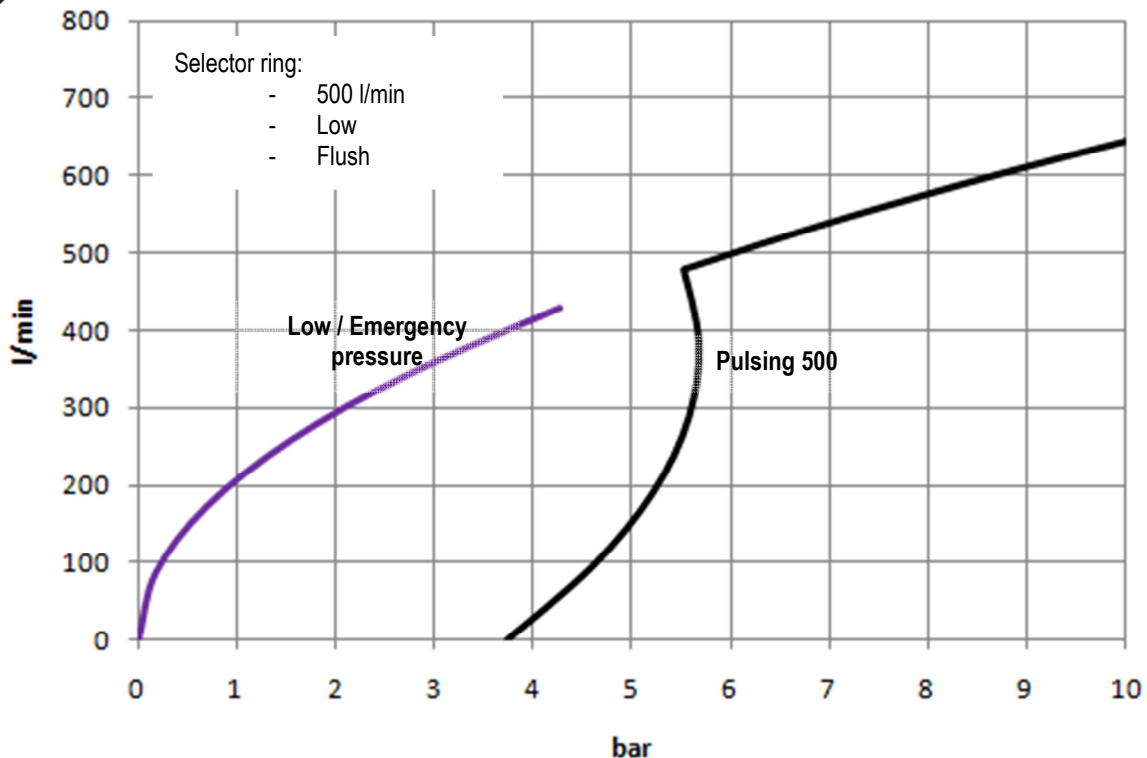

### REDUCED COST OF OWNERSHIP:

Very light maintenance requirement due to the nozzle design and materials used.



Ultiforce 500-ZF01.124.EN.1

As it is our policy to constantly seek to improve our products, we reserve the right to change the specification of our equipment without notice