


Honeywell ChemSoft®

CE412W – Cleanroom Nitrile Disposable Glove

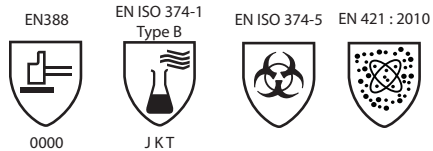

GENERAL INFORMATION			
Base Material	Nitrile	Glove Length	12 in (38 cm +2.5-1.3 cm)
Lining	Unsupported	Glove Thickness	4 mil
Material Color	White	Sizes	6XS-10XL
Surface Finish	Textured	Country of Origin	Malaysia
Cuff Style	Bead	Case Pack Qty.	100 gloves per bag / 100 bags per case
Case weight	18lbs	Case Dims:	12L x 11.5W x 10.5H

PRODUCT FEATURES

- Cleanroom packaged for protection against airborne contamination. Double bagged with cleanroom compatible packaging and labeling materials
- Surface resistivity $\leq 10^{10}$ ohms/sq.
- Low modulus formulation is stretchy for a more comfortable fit
- Suitable for up to class 100 clean-room
- Testing: IEST-RP-CC005.3 for particulate and extractable; ASTM 739 permeation
- Antistatic formulation eliminates static discharge in many cases
- 100% nitrile rubber does not contain allergy-causing proteins
- Rolled cuff prevents tearing when donning

APPLICATIONS

Cleanroom operations such as acid etching, handling etching and cleaning acids and caustics, lab room maintenance



CERTIFICATIONS / STANDARDS

OSHA Standard - 29 CFR 1915.157 The employer shall ensure that each affected employee uses appropriate hand protection and other protective clothing where there is exposure to hazards such as skin absorption of harmful substances, severe cuts or lacerations, severe abrasions, punctures, chemical burns, thermal burns, harmful temperature extremes, and sharp objects.

21 CFR 177: Complies with USDA and FDA regulations for food contact



WARNINGS

*Extreme caution should be used around moving machinery.

**Cleaning gloves that have been in contact with toxic or corrosive chemicals may result in a chemical reaction, including fumes that could cause personal injury, serious illness, or death.

LAUNDERING / STORAGE

Chemical resistant gloves are not designed for laundering.

Three year shelf life from manufacture date when stored in original packaging in a cool dry place away from light.

Recommended temperature range: 50°F to 86°F (10°C to 30°C).

LIMITED WARRANTY

Honeywell products are covered by and subject to the terms of the Honeywell Safety Products Limited Warranty that is printed in our published price list. The Honeywell Safety Products Limited Warranty is the only written warranty of any force and effect, and all other written warranties are disclaimed in their entirety. In no event shall Honeywell Safety Products or any of its authorized dealers be liable for any damages in excess of the purchase price of the relevant product. This limitation applies to damages of any kind, including but not limited to direct or indirect damages or other special, incidental, exemplary or consequential damages, whether arising out of the use of, or inability to use the product, even if we or any of our authorized dealers has been advised of the possibility of the damages or any claim by any other party.

For technical inquires contact technical services:

Technical Service: 800.873.5242 (option 6)

Email: hsptechsupport@honeywell.com

Honeywell Industrial Safety

900 Douglas Pike
Smithfield, RI 02917

United States:

Tel. 800.430.5490

Fax. 800.322.1330

www.honeywell.com

Canada:

Tel. 888.212.7233

Fax. 888.667.8477