

# Mixed blade Hydraulic Cutters

▼ Mixed blade Hydraulic Cutters CHM 205 CXT / 275 CXT / 2050 CXT / 2750 CXT



Optimised cutters for cutting automobile profiles.

## DESCRIPTION

High resistant light alloy unit with anti-wear treatment.  
Can be used in an aquatic zone.


Tool comprises of :

- 1 Double acting cylinder.
- 1 Ergonomically shaped operating handle with a built in safety feature.
- Automatic locking mono coupling with flat faced pre-centering cone and metallic protection cap
- 2 straight and curved high resistant forged steel blades with anti-corrosion treatment.
- 1 U type holding handle.



## OPTION :

- Adjustable carrying handle

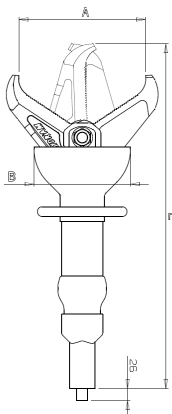

## CHARACTERISTICS

Model	CHM 205 CXT	CHM 275 CXT	CHM 2050 CXT	CHM2750 CXT
Operating pressure	700 bar	700 bar	700 bar	700 bar
Cutting force	694 kN	694 kN	950 kN	950 kN
Depth of cut	175 mm	154 mm	175 mm	154 mm
Maximum opening A	205 mm	276 mm	205 mm	276 mm
Dimensions (mm)	764x224x177	779x259x212	774x224x177	791x259x212
Weight	14,9 kg	13,56 kg	16.9 kg	15,86 kg
Tool classification EN 13204	CC 205-H/14,9	CC 130-H/13,56	CC 205-H/16,9	CC 130-H/15,86

Powerful, Lightweight and Reliable in Rescue Operations