

Hydraulic Spreaders



MADE IN FRANCE

▼ Hydraulic Spreaders EHM 750 - EHL 620 / 800 - EHS 570




The optimal force of **HYDR'AM** tools assure complete safety during spreading, pulling, crushing and lifting operations.

DESCRIPTION

High strength hardened light alloy unit.
Can be used in wet conditions.

Tool comprises :

- 1 Double action cylinder.
- 1 Ergonomically shaped control handle with integrated safety device and piloting.
- 1 Set of hoses 0.5m long, with automatically locking anti-pollution HP quick action couplers fitted with metal protection plugs.
- 2 Forged high strength light alloy arms fitted with interchangeable serrated tips without tools. The tips are made from high strength, hardened and anti-corrosion treated steel.
- Pressure relief valve for hose on coupler end.

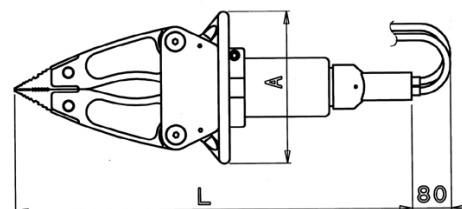

CHARACTERISTICS

Model	EHM 750	EHL800	EHL620	EHS570
Operating pressure	700 bar	700 bar	700 bar	700 bar
Spreading force F	41 kN	66 kN	97 kN	92 kN
Maximum spreading force F3	> 132 kN	> 202 kN	> 373 kN	> 260 kN
Traction force F4/F5	49 / 41 kN	128 / 51.2 kN	138 / 82 kN	114,4 / 62 kN
Maximum opening B	750 mm	800 mm	620 mm	565 mm
Maximum Pulling Stroke	502 mm	565 mm	378 mm	431 mm
Dimensions (mm) LxAxH	809x310x205	860x360x200	761x360x195	911x370x244
Weight	19,6 kg	27,3 kg	25 kg	32,6 kg
Tool classification EN 13204	AS 41-750/19,6	BS 63-800/27,3	CS 88-620/25	CS 91-565/32,6

Powerful, Lightweight and Reliable in Rescue Operations



Chemin du Lyonnais - 69720 St Bonnet de Mure FRANCE- 33 (0) 4 72 48 90 05 - fax:33 (0) 4 72 48 90 03

☎:Site : www.hydram.com - E-mail : hydram@wanadoo.fr