

EMERGENCY BODY SHOWERS / EYE WASHES

The use of emergency showers ensures important and immediate „first aid“ with water for those affected by contact with hazardous substances.

- ◆ Design complies with EN 15154-1 & 2, ANSI Z358-1.2004
- ◆ Optimal protection of the showers against aggressive atmospheres and the effects of weather by powder coating and/or stainless steel

MOBILE EYE WASHES

ND 181 0020 / B81-3000-C:

- ◆ 1 water jet controller protected by dust cover
- ◆ Wall mounting including wall holder
- ◆ Water connection 1/2" inner thread
- ◆ Self-locking valve
- ◆ Stainless steel coated silicone tubing 1,5 m



WALL-MOUNTED EYE WASHES

ND 151 1005 / B81-3010-C:

- ◆ 2 water jet controllers
- ◆ Wall mounting
- ◆ Water connection 3/8" outer thread
- ◆ ABS sump tray, ceramic white
- ◆ Stainless steel valve
- ◆ Water jet controller with dust covers
- ◆ Actuated by pressure plate
- ◆ With safety sign



ND 151 1001 / B81-3011-C:

- ◆ 2 water jet controllers
- ◆ Wall mounting
- ◆ Water connection 3/8" outer thread
- ◆ ABS sump tray and cover
- ◆ Stainless steel valve
- ◆ Cover protects against dirt
- ◆ Operated by pressing the button or pulling down the cover
- ◆ With safety sign



ND 181 0015 / B81-3012-C:

- ◆ 2 water jet controllers
- ◆ Water connection 1/2" inner thread
- ◆ Water jet controller with dust covers
- ◆ Operated by press lever



EMERGENCY BODY SHOWERS - WALL-MOUNTED

ND 121 2006 / B81-3020-C:

- ◆ Wall mounting
- ◆ Water connection 1" inner thread
- ◆ Chrome-plated brass valve, tubes galvanized and powder-coated
- ◆ Shower head made from plastic
- ◆ Operated by pull rod



Article No. B81-3020-C


ND 121 1006 / B81-3021-C:

- ◆ As ND 121 2006, but made completely from stainless steel

EMERGENCY BODY SHOWERS - CEILING-MOUNTED

ND 121 2007 / B81-3030-C:

- ◆ Ceiling mounting
- ◆ Water connection 1" inner thread
- ◆ Chrome-plated brass valve, tubes galvanized
- ◆ Shower head made from plastic
- ◆ Operated by pull rod

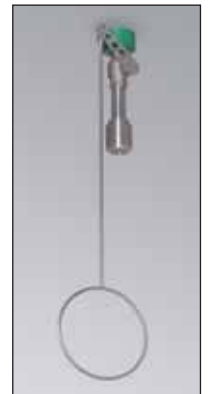

Art. No. B81-3031-C

ND 121 1007 / B81-3031-C:

- ◆ As ND 121 2007, but made completely from stainless steel

SAFETY SIGNS

Eye wash safety sign sticker

B81-3050-C

- ◆ 200 x 200 mm



Emergency body shower safety

sign sticker B81-3051-C

- ◆ 200 x 200 mm

Emergency body shower / eye wash

safety sign sticker (not illustrated)

- ◆ 400 x 230 mm



FREE-STANDING BODY SHOWERS WITH EYE-WASH

Specially developed emergency shower systems for industrial use in production, filling plant or store rooms. You can choose between versions with stainless steel tubes and valves or galvanized, white-coated steel tubes and brass valves. All emergency body showers are equipped with water jet spray nozzle according to DIN EN 15154-1 and DIN 12899T3 (2008). Both versions meet and exceed the minimum legal requirements of DIN and EN standards and provide a high water flow for rapid decontamination and wetting.

ND 121 2004 / B81-3040-C:

- ◆ Free-standing emergency shower combination
- ◆ Eye-wash with ABS plastic sump tray and stainless steel back wall
- ◆ Tubes galvanized and powder-coated, chrome-plated brass valve
- ◆ Eye-wash with two spray heads and dust covers
- ◆ Triggered by pull-rod / 90° rotation



Article No. B81-3040-C

ND 121 2005 / B81-3042-C:

- ◆ Free-standing emergency shower combination
- ◆ Eye-wash with ABS plastic sump tray and cover, with stainless steel back wall
- ◆ Tubes galvanized and powder-coated, chrome-plated brass valve
- ◆ Eye-wash with two spray heads and dust covers
- ◆ Triggered by pull-rod / 90° rotation



Article No. B81-3042-C

ND 121 1004 / B81-3041-C:

- ◆ As ND 121 2004, but made completely from stainless steel

ND 121 1005 / B81-3043-C:

- ◆ As ND 121 2005, but made completely from stainless steel

FROST-FREE EMERGENCY SHOWERS & EMERGENCY SHOWER TANKS

Frost-free with heating!

Emergency showers have to function properly 24 hours per day and 7 days per week. This also applies to outdoor locations and temperatures below freezing point. Our showers use a self-regulating heating cable in combination with an insulation package to ensure operation under freezing conditions. The system is controlled by a built-in thermostat. All parts coming into contact with water are additionally protected against strong frost by an insulation package with a stainless steel cover. You can choose between different versions and accessories.



Example of a version with heating

Emergency showers with storage tank

Our special emergency showers with storage tanks are used in areas where water is not permanently supplied or where the water has to be available at a particular temperature.

A storage volume of 350 to 1200 liters can be selected, depending on the location and degree of risk. Heated versions are used in outdoor locations to ensure frost-free operation.

A thermostat-controlled immersion heater ensures that the set temperature is maintained.



Example of an emergency shower with storage tank



Different versions are available on request!