


• NOHA MODEL GALLERY

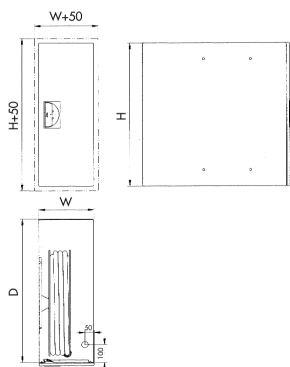

NOHA FIRE HOSE REEL IN CABINET FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a wall-bracket inside the cabinet. Can easily be removed from the cabinet to facilitate the installation.

For shopping centres, airports, office buildings, schools, kindergartens, cinemas and conference centres with limited wall-space.

NOHA MODEL GALLERY IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system
- NOHA jet/spray/shut-off nozzle
- NOHA light semi-rigid woven textile hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catch/release handle
- Roller hose guide allowing the hose to be run out in any direction
- Ø35 mm knockouts for inlet pipework in the bottom of the cabinet
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
Gallery	20		305 x 795 x 795	560148
Gallery	25		305 x 795 x 795	560149
Gallery	30		305 x 795 x 795	560150
Gallery		20	305 x 795 x 795	560151
Gallery		25	305 x 795 x 795	560152
Gallery		30	305 x 795 x 795	560153
Trim frame for recess-mounting			305 x 795	555201

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Hinges on left hand side



• NOHA MODEL GALLERY A

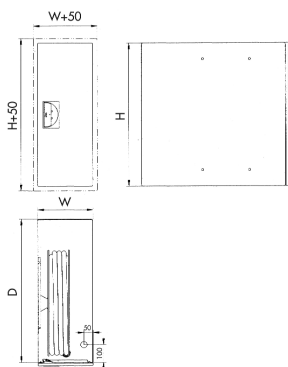

NOHA FIRE HOSE REEL IN CABINET, WITH AUTOMATIC STOP VALVE, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a wall-bracket inside the cabinet. Can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For shopping centres, airports, office buildings, schools, kindergartens, cinemas and conference centres with limited wall-space.

NOHA MODEL GALLERY A IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated automatic stop valve
- NOHA quick-change coupling system
- NOHA jet/spray/shut-off nozzle
- NOHA light semi-rigid woven textile hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catch/release handle
- Roller hose guide allowing the hose to be run out in any direction
- Ø35 mm knockouts for inlet pipework in the bottom of the cabinet
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
Gallery A	20		305 x 795 x 795	560142
Gallery A	25		305 x 795 x 795	560143
Gallery A	30		305 x 795 x 795	560144
Gallery A		20	305 x 795 x 795	560145
Gallery A		25	305 x 795 x 795	560146
Gallery A		30	305 x 795 x 795	560147
Trim frame for recess-mounting			305 x 795	555201

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Hinges on left hand side

