


• NOHA MODEL GALLERY SST

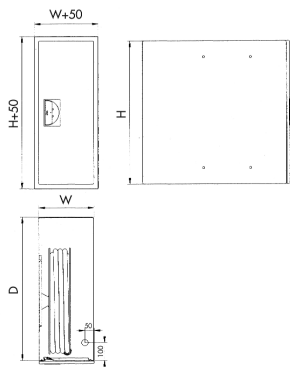

NOHA FIRE HOSE REEL IN CABINET FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a wall-bracket inside the cabinet. Can easily be removed from the cabinet to facilitate the installation.

For shopping centres, airports, office buildings, schools, kindergartens, cinemas and conference centres with limited wall-space.

NOHA MODEL GALLERY SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system
- NOHA jet/spray/shut-off nozzle
- NOHA light semi-rigid woven textile hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Door and frame brushed stainless steel
- NOHA door catch/release handle
- Roller hose guide allowing the hose to be run out in any direction
- Ø35 mm knockouts for inlet pipework in the bottom of the cabinet
- Cabinet powder coated RAL 9010 white gloss 15
- Double 45° wall signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
Gallery SST	20		305 x 795 x 795	560162
Gallery SST	25		305 x 795 x 795	560163
Gallery SST	30		305 x 795 x 795	560164
Gallery SST		20	305 x 795 x 795	560165
Gallery SST		25	305 x 795 x 795	560166
Gallery SST		30	305 x 795 x 795	560167

OPTIONS

- Door and frame polished stainless steel
- Hinges on left hand side



• NOHA MODEL GALLERY A SST

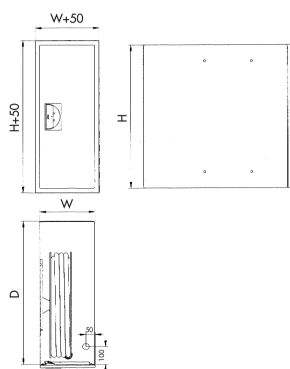

NOHA FIRE HOSE REEL IN CABINET, WITH AUTOMATIC STOP VALVE, FOR RECESS-MOUNTING, DOOR AND FRAME BRUSHED STAINLESS STEEL

Hose reel mounted on a wall-bracket inside the cabinet. Can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For shopping centres, airports, office buildings, schools, kindergartens, cinemas and conference centres with limited wall-space.

NOHA MODEL GALLERY A SST IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated automatic stop valve
- NOHA quick-change coupling system
- NOHA jet/spray/shut-off nozzle
- NOHA light semi-rigid woven textile hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Door and frame brushed stainless steel
- NOHA door catch/release handle
- Roller hose guide allowing the hose to be run out in any direction
- Ø35 mm knockouts for inlet pipework in the bottom of the cabinet
- Cabinet powder coated RAL 9010 white gloss 15
- Double 45° wall signs in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
Gallery A SST	20		305 x 795 x 795	560156
Gallery A SST	25		305 x 795 x 795	560157
Gallery A SST	30		305 x 795 x 795	560158
Gallery A SST		20	305 x 795 x 795	560159
Gallery A SST		25	305 x 795 x 795	560160
Gallery A SST		30	305 x 795 x 795	560161

OPTIONS

- Door and frame polished stainless steel
- Hinges on left hand side

