


• NOHA MODEL 3 SST P

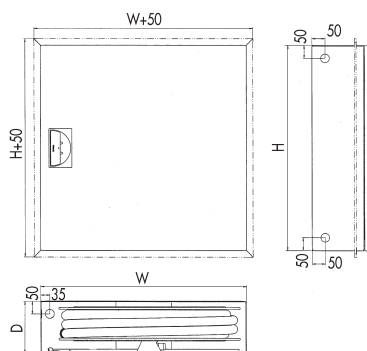

NOHA FIRE HOSE REEL AND CABINET FOR WALL-MOUNTING OR RECESS-MOUNTING, POWDER COATED STAINLESS STEEL

Hose reel mounted on the door which opens 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in swimming facilities or other corrosive environment.

NOHA MODEL 3 SST P IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs in stainless steel powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- Cabinet in stainless steel powder coated RAL 9010 white gloss 15
- NOHA door catch/release handle
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Ø35 mm knockouts for inlet pipework on 3 sides
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
3 SST P	20		795 x 795 x 110	555270
3 SST P	25		795 x 795 x 110	555271
3 SST P	30		795 x 795 x 110	555272
3 SST P		20	795 x 795 x 200	555273
3 SST P		25	795 x 795 x 200	555274
3 SST P		30	795 x 795 x 200	555275
3 SST P	20		695 x 695 x 110	555276
3 SST P	25		695 x 695 x 160	555277
3 SST P	30		695 x 695 x 160	555278
3 SST P		20	695 x 695 x 285	560189
3 SST P		25	695 x 695 x 285	560190
3 SST P		30	695 x 695 x 285	560191
Trim frame SST P for recess mounting			695 x 695	560192
			795 x 795	560193

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Hinges on left hand side
- Red hose
- Light hose

