


• NOHA MODEL 31

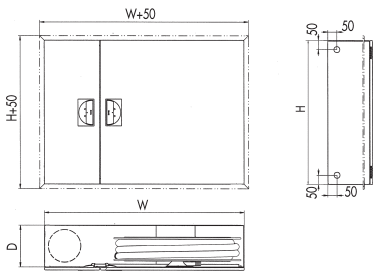

NOHA FIRE HOSE REEL AND CABINET WITH EQUIPMENT COMPARTMENT FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on the door which opens 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31 IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet, except back wall, powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31	20		1105 x 795 x 230	555098
31	25		1105 x 795 x 230	555099
31	30		1105 x 795 x 230	555100
31		20	1105 x 795 x 230	555101
31		25	1105 x 795 x 230	555102
31		30	1105 x 795 x 230	555103
31	20		1005 x 695 x 230	555104
31	25		1005 x 695 x 230	555105
31	30		1005 x 695 x 230	555106
Trim frame for recess mounting			1105 x 795	555206
			1005 x 695	555205

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31A

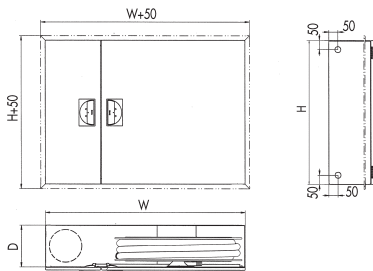

NOHA FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET WITH EQUIPMENT COMPARTMENT, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on the door which opens 180°. The reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31A IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA special supply hose
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet, except back wall, powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31A	20		1105 x 795 x 230	555107
31A	25		1105 x 795 x 230	555108
31A	30		1105 x 795 x 230	555109
31A		20	1105 x 795 x 230	555110
31A		25	1105 x 795 x 230	555111
31A		30	1105 x 795 x 230	555112
31A	20		1005 x 695 x 230	555113
31A	25		1005 x 695 x 230	555114
31A	30		1005 x 695 x 230	555115
Trim frame for recess mounting			1105 x 795	555206
			1005 x 695	555205

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31SW

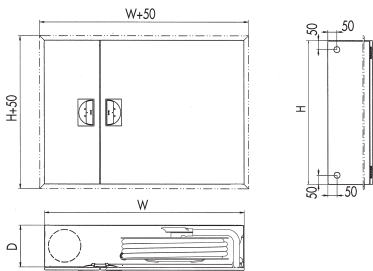

NOHA SWINGING FIRE HOSE REEL AND CABINET WITH EQUIPMENT COMPARTMENT, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31SW IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31SW	20		1105 x 795 x 230	555116
31SW	25		1105 x 795 x 230	555117
31SW	30		1105 x 795 x 230	555118
31SW		20	1105 x 795 x 285	555119
31SW		25	1105 x 795 x 285	555120
31SW		30	1105 x 795 x 285	555121
Trim frame for recess mounting			1105 x 795	555206

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Doors for vision panel
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose



• NOHA MODEL 31SWA

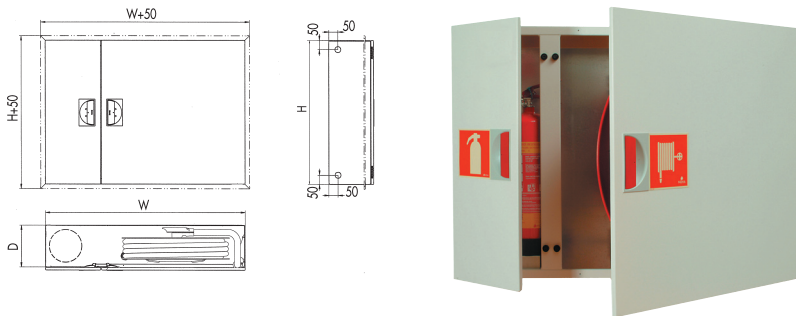

NOHA SWINGING FIRE HOSE REEL WITH AUTOMATIC STOP VALVE AND CABINET WITH EQUIPMENT COMPARTMENT, FOR WALL-MOUNTING OR RECESS-MOUNTING

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The hose reel can easily be removed from the cabinet to facilitate the installation. The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in office buildings, schools, hospitals, kindergartens, sports arenas, cinemas, hotels and conference centres, airports and shopping centres.

NOHA MODEL 31SWA IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA swinging arm with internal waterways
- Centre parts made of brass
- Adjustable brake
- Hinges on right hand side
- NOHA door catches/release handles
- Ø35 mm knockouts for inlet pipework on 3 sides
- Removable back wall, made of galvanized steel; can be used as a mounting template
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
31SWA	20		1105 x 795 x 230	555122
31SWA	25		1105 x 795 x 230	555123
31SWA	30		1105 x 795 x 230	555124
31SWA		20	1105 x 795 x 285	555125
31SWA		25	1105 x 795 x 285	555126
31SWA		30	1105 x 795 x 285	555127
Trim frame for recess mounting			1105 x 795	555206

OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL ____ (smooth surface gloss 70)
- Doors for vision panel
- Compartment door for manual call point
- Hinges on left hand side
- Red hose
- Light hose

