


# • NOHA MODEL 5Ci

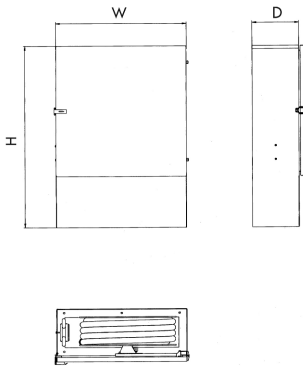

## NOHA FREE-STANDING FIRE HOSE REEL AND CABINET WITH INSULATION AND HEATING FOR FLOOR-MOUNTING IN COLD ROOMS

Hose reel mounted on a swinging arm with internal waterways which swings 180°. The reel can easily be removed from the cabinet to facilitate the installation. The cabinet is equipped with insulation and a thermostatically controlled heating element and will withstand temperatures down to -35°C (measured in zero wind) without the water freezing.

For use in cold rooms with temperatures below freezing point and where it is impossible or undesirable to mount it on the wall. Model 5Ci is unsuitable for installation outdoors or in corrosive environments.

### NOHA MODELL 5Ci IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- NOHA supply hose
- Center parts made of brass
- Adjustable brake
- Cabinet made of steel, lined with 20 mm of insulation
- Door fitted with rubber gasket and hinges on the right hand side
- One throw-over door catch
- 200W/230V thermostatically controlled heating element
- Cabinet powder coated RAL 9010 white gloss 15
- Door sign in accordance with Council Directive 92/58/EEC
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm W x H x D	Order number
	19 mm	25 mm		
5Ci	30		795 x 1105 x 285	560102
5Ci		30	795 x 1105 x 285	560103

### OPTIONS

- Cabinet RAL 3001 red
- Cabinet RAL \_\_\_\_\_ (smooth surface gloss 70)
- Hinges on left hand side
- Red hose

