


# • NOHA MODEL S81

## OFFSHORE FIRE HOSE REEL FOR FLOOR- OR WALL-MOUNTING

Gunmetal piping parts, for sea water.

For use in production areas offshore and at petrochemical plants, and on helideck together with foam.

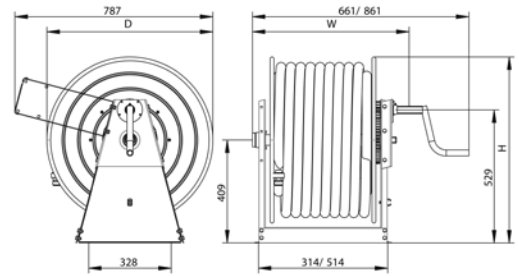

### NOHA MODEL S81 IS SUPPLIED WITH:

- Hose reel made of galvanized steel
- Piping parts gunmetal
- Paint according to NOHA offshore specification for galvanized steel, RAL 3000 red
- Oil resistant, antistatic rubber hose with working pressure 20 bar, and pressed SST hose couplings
- 1:3 rewind gearing device with attachable hand-crank
- Water inlet 2" BSP male left hand side
- Design pressure 20 bar
- Design temperature -9/+35°C
- Water supply through the centre of the reel
- Hose coupling reel end 25mm: 1" BSP female, swivel, gunmetal
- Hose coupling nozzle end 25mm: 1" BSP male, fixed, gunmetal
- Hose coupling reel end 31mm: 1" BSP female, swivel, gunmetal
- Hose coupling nozzle end 31mm: 1" BSP male, fixed, gunmetal
- Hose coupling reel end 38mm: 1 1/2" BSP female, swivel, gunmetal
- Hose coupling nozzle end 38mm: 1 1/2" BSP male, fixed, gunmetal
- Bolts and nuts in stainless steel
- NOHA installation instructions
- *Nozzle and documentation are not included*
- **Options:** See page 13-15

| Model | Hose length |       |       | Dimensions in mm<br>W x H x D | Order number | Dry weight |
|-------|-------------|-------|-------|-------------------------------|--------------|------------|
|       | 25 mm       | 31 mm | 38 mm |                               |              |            |
| S81   | 0 m         |       |       | 430 x 740 x 660               | 400 050      | 35 kg      |
| S81   | 20 m        |       |       | 430 x 740 x 660               | 400 046      | 54 kg      |
| S81   | 25 m        |       |       | 430 x 740 x 660               | 400 045      | 58 kg      |
| S81   | 30 m        |       |       | 430 x 740 x 660               | 400 051      | 62 kg      |
| S81   | 0 m         |       |       | 630 x 740 x 660               | 400 099      | 43 kg      |
| S81   | 50 m        |       |       | 630 x 740 x 660               | 400 100      | 88 kg      |
| S81   |             | 0 m   |       | 630 x 740 x 660               | 400 099      | 43 kg      |
| S81   |             | 30 m  |       | 630 x 740 x 660               | 400 053      | 75 kg      |
| S81   |             |       | 0 m   | 630 x 740 x 660               | 400 054      | 43 kg      |
| S81   |             |       | 30 m  | 630 x 740 x 660               | 400 055      | 82 kg      |

Can be delivered in brown as a Diesel Utility Hose Reel, with recommended Design Pressure 15 Bar.

