

### SPECIFICATIONS

Potter Roemer/ Fire Pro® stacked straight bore nozzles consist of a series of different orifice sizes that may be unscrewed and removed or replaced in order to achieve a range of flow rates.




FP3220 (Shown)


### REGULARLY FURNISHED

- Anodized aluminum construction


MODEL	INLET In (mm)	WEIGHT Lbs (kg)	GPM (lpm)
Fp3220	2-1/2" (64)	8 (2)	1-3/4, 1-1/2, 1-3/8 (44, 38, 35)
FP3230	2-1/2" (64)	8 (2)	2, 1-3/4, 1-1/2, 1-3/8 (51, 44, 38, 35)
Fp3240	2-1/2" (64)	8 (2)	1-1/4, 1-1/8, 1 (32, 29, 25)

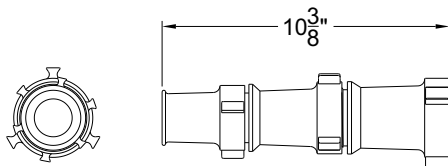

FP3220

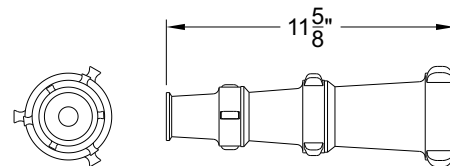

FP3240

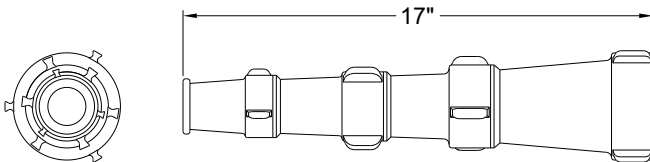

FP3230

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacture's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superceded data. Please visit [potterroemer.com](http://potterroemer.com) for most current specifications

**ST-FP3220**

Revised: 09/05/18

**MEMBERSHIP**



FIRE EQUIPMENT  
MANUFACTURERS'  
ASSOCIATION



**POTTER ROEMER/FIRE PRO**

Headquarters:  
P.O. Box 3527  
City of Industry, CA  
91744 U.S.A.  
Los Angeles Area  
800-366-3473  
626-855-4890

Also in:  
New York (800) 526-4592  
Chicago (800) 547-3473  
Atlanta (800) 762-0542  
Miami (866) 961-3473  
Dallas (866) 644-3473

[www.potterroemer.com](http://www.potterroemer.com)