



SPECIFICATION SHEET

205-375FR

FALCON™ HYDROFR TREATED 2 PIECE RAINSUIT

- .33mm PVC/Polyester
- Welded seams
- FR-Limited flammability - ASTM D6413
- Attached hood with drawstring
- Hook & loop and snap storm flap closures
- 12" x 12" shroud
- 360° high bib overall
- Hook & loop closure on wrist, ankle and neck

APPLICATIONS

- Rainy work conditions
- Hydroblast / Pressure washing
- Petro/chemical industries
- Construction / Shipyards
- High municipalities
- Janitorial
- Agricultural chemical spraying
- Industrial plant maintenance
- NOT for use in Arc Flash or Flash Fire situations

CARE INSTRUCTIONS

Wipe clean with damp cloth. Do not dry clean, machine wash or iron.
Line dry away from heat.

TECHNICAL DATA

MATERIAL	PVC / Polyester
CONSTRUCTION	.33mm PVC / Polyester (13mil)
COLOR	Yellow
SIZES	S - 8X
PACKAGING	1 per polybag / 10 per case
CASE DIMENSIONS	12" x 14" x 10" / 30cm x 35cm x 25cm
CASE WEIGHT	44lbs / 20kg
COO	China

BARCODES


ITEM	BAG	BOX	CASE
205-375FR/S	616314193279	---	02616314193277
205-375FR/M	616314193286	---	02616314193284
205-375FR/L	616314193293	---	02616314193291
205-375FR/XL	616314193309	---	02616314193307
205-375FR/2XL	616314193316	---	02616314193314
205-375FR/3XL	616314193323	---	02616314193321
205-375FR/4XL	616314193330	---	02616314193338
205-375FR/5XL	616314193347	---	02616314193345
205-375FR/6XL	616314206764	---	02616314206762
205-375FR/7XL	616314206771	---	02616314206779
205-375FR/8XL	616314206788	---	02616314206786



Face shield not included

DIMENSIONS (in/cm)

	S	M	L	XL	2XL	3XL	4XL	5XL	6XL	7XL	8XL
A	16.5/41.9	18/45.7	18.5/47	18.5/47	16.5/41.9	19/48.3	21/53.3	21/53.3	21/53.3	22/56.9	22/56.9
B	50/127	52/132.1	54/137.2	56/142.2	59/149.9	62/157.5	64/162.6	66/167.6	68/167.6	70/172.7	72/182.9
C	30/76.2	31/78.7	32/81.3	33/83.8	34/86.4	35/88.9	36/91.4	37/94	38/96.5	39/99.1	40/101.6
D	46/116.8	47/119.4	48/121.9	50/127	52/132.1	54/137.2	56/142.2	58/147.3	60/152.4	62/157.5	64/162.6
E	29/73.7	29.5/74.9	30/76.2	31/78.7	32/81.3	33/83.8	34/86.4	35/88.9	36/91.4	37/94	38/96.5
F	46.5/118.1	47.5/120.7	48.5/123.2	50/127	51/129.5	52/132.1	54/137.2	55.5/141	56.5/143.5	57.5/146	58.5/148.6
G	29/73.7	29.5/74.9	30/76.2	31/78.7	32/81.3	33/83.8	34/86.4	35/88.9	36/91.4	37/94	38/96.5
H	9.75/24.8	9.75/24.8	9.75/24.8	9.75/24.8	9.75/24.8	10.75/27.3	10.75/27.3	10.75/27.3	10.75/27.3	10.75/27.3	10.75/27.3

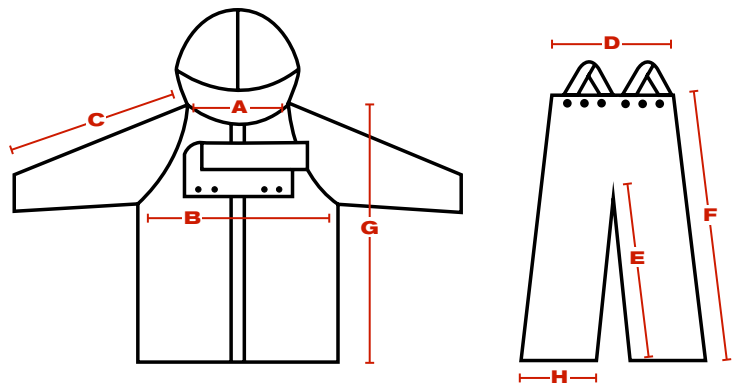

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.