



SPECIFICATION SHEET

34-225V



G-TEK® GP™ SEAMLESS KNIT NYLON GLOVE WITH NITRILE COATED SMOOTH GRIP ON PALM & FINGERS

- Seamless one-piece nylon shell offers increased comfort, finger dexterity and breathability
- Solid Dipped Nitrile coatings provide excellent dry grip and will not absorb liquids into the coating
- Knit Wrist helps prevent dirt and debris from entering the glove

APPLICATIONS

Ideal for manufacturing and assembly applications where abrasion, cut, and puncture resistance is required.

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)


TECHNICAL DATA

MATERIAL	Nylon with nitrile coating on palm and fingers				
COLOR	<input type="checkbox"/> White / <input type="checkbox"/> Gray				
CUFF STYLE	Continuous Knit				
SIZES	XS - XL				
PACKAGING	1 tri-folded pair per bag; 6 pair per pack; 50 packs per case (300 pair)				
CASE	XS: 20.1" x 9.8" x 20.1" / 51cm x 25cm x 51cm S: 20.1" x 9.8" x 20.1" / 51cm x 25cm x 51cm M: 20.9" x 10.2" x 20.9" / 53cm x 26cm x 53cm L: 20.9" x 10.6" x 21.3" / 53cm x 27cm x 54cm XL: 20.9" x 10.6" x 21.3" / 53cm x 27cm x 54cm				
CASE WEIGHT	XS	S	M	L	XL
	27.5 lbs 12.5 kg	30 lbs 13.6 kg	33 lbs 15 kg	35 lbs 15.9 kg	35 lbs 15.9 kg
COO	China				



DIMENSIONS (in/cm)

	XS	S	M	L	XL
A	7.9 / 20	8.9 / 22.5	9.4 / 24	9.8 / 25	10.2 / 26
B	3.2 / 8.2	3.3 / 8.5	3.5 / 9	3.7 / 9.5	3.9 / 10
H	<input type="checkbox"/> Blue	<input type="checkbox"/> White	<input type="checkbox"/> Green	<input type="checkbox"/> Brown	<input type="checkbox"/> Yellow

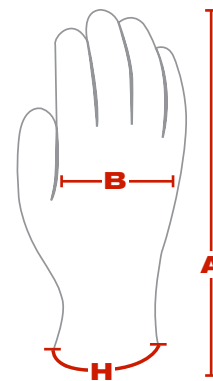

PERFORMANCE PROPERTIES

EN388: 4121						
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5

BARCODES

ITEM	PAIR	PACK	CASE
<input type="checkbox"/> 34-225V/XS	616314210549	01616314210548	02616314210547
<input type="checkbox"/> 34-225V/S	616314210525	01616314210524	02616314210523
<input type="checkbox"/> 34-225V/M	616314210518	01616314210517	02616314210516
<input type="checkbox"/> 34-225V/L	616314210501	01616314210500	02616314210509
<input type="checkbox"/> 34-225V/XL	616314210532	01616314210531	02616314210530