



SPECIFICATION SHEET

48-L160Y



1010

ASSURANCE® UNSUPPORTED LATEX, FLOCK LINED WITH HONEYCOMB GRIP - 16 MIL

- Resistance to acids, alkalis, alcohols, salts, ketones, and animals fats
- Flock lining provides increased comfort and ease of donning
- Honeycomb pattern for an enhanced grip
- Straight cuff adds length to protect the forearm from liquid run-off
- Made from component materials which comply with FDA regulations for food contact. 21CFR, 170-199
- Chlorinated
- CFIA Approved
- Silicone Free

APPLICATIONS

- Janitorial
- Sanitation
- General maintenance

CARE INSTRUCTIONS

It is strongly advised to not wash and re-use these gloves when they are used to protect against chemical products

TECHNICAL DATA

| | |
|-------------|--|
| MATERIAL | Natural rubber latex |
| COLOR | Yellow |
| CUFF STYLE | Straight cuff |
| SIZES | S - XXL |
| PACKAGING | 12 per dozen, 12 dozen per case |
| CASE | 12.6" x 10.9" x 12.5" / 32cm x 27.6cm x 31.8cm |
| CASE WEIGHT | 17.6 lbs / 3.7 kg |
| COO | Malaysia |



DIMENSIONS (in/cm)

| | S | M | L | XL | XXL |
|------------------------------|-------------|-------------|-------------|-------------|-------------|
| A | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 |
| B | 3.5 / 9.0 | 3.9 / 10.0 | 4.3 / 10.8 | 4.6 / 11.6 | 5.1 / 13.0 |
| Palm Thickness: 0.40mm | | | | | |
| Cuff Thickness: 0.35mm | | | | | |
| Finger Tip Thickness: 0.43mm | | | | | |

PERFORMANCE PROPERTIES


| EN388: 1010 | | | | | | |
|-------------|---|---|---|---|---|---|
| ABRASION | 0 | 1 | 2 | 3 | 4 | 5 |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | 5 |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | 5 |

ELONGATION INFORMATION

| BEFORE AGING | | AFTER ACCELERATED AGING | |
|----------------------------|----------------------|----------------------------|----------------------|
| Tensile Strength (minimum) | Elongation (minimum) | Tensile Strength (minimum) | Elongation (minimum) |
| (Mpa) | % | (Mpa) | % |
| 10 | 500 | 75 | 375 |

BARCODES

| ITEM | BAG | DOZEN | CASE |
|--------------|-----|----------------|----------------|
| 48-L160Y/XXL | --- | 01616314035203 | 02616314035203 |
| 48-L160Y/XL | --- | 01616314035197 | 02616314035197 |
| 48-L160Y/L | --- | 01616314035166 | 02616314035166 |
| 48-L160Y/M | --- | 01616314035173 | 02616314035173 |
| 48-L160Y/S | --- | 01616314035180 | 02616314035180 |

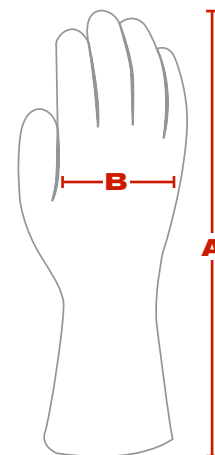

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.