



SPECIFICATION SHEET

48-L212Y



ASSURANCE[®] UNSUPPORTED LATEX, INDUSTRIAL FLOCK LINED WITH RAISED DIAMOND GRIP - 21 MIL

- Provides resistance to acids, alkalis, alcohols, salts, keytones and animal fats; chlorinated
- Flock lining provides increased comfort and ease of donning
- Rolled cuff adds additional strength to cuff edge for longer glove life and prevents liquid run-off
- Made from component materials which comply with Federal regulations for food contact. 21CFR, 170-199
- CFIA Approved
- Silicone Free

APPLICATIONS

- Janitorial
- Sanitation
- General maintenance

CARE INSTRUCTIONS

It is strongly advised to not wash and re-use these gloves when they are used to protect against chemical products

TECHNICAL DATA

MATERIAL	Natural rubber latex, cotton				
COLOR	Yellow				
CUFF STYLE	Rolled bead				
SIZES	XS - XL				
PACKAGING	12 per dozen, 12 dozen per case				
CASE	16.9" x 9.8" x 14.2" / 43cm x 25cm x 36cm				
CASE WEIGHT	XS	S	M	L	XL
	20.0 lbs 9.1 kg	21.3 lbs 9.3 kg	22.9 lbs 10.4 kg	25.4 lbs 11.5 kg	28.6 lbs 13.0 kg
COO	Sri Lanka				



DIMENSIONS (in/cm)


	XS	S	M	L	XL
A	11.8 / 30.0	11.8 / 30.0	11.8 / 30.0	11.8 / 30.0	11.8 / 30.0
B	3.7 / 9.5	3.9 / 10.0	4.1 / 10.5	4.4 / 11.3	4.8 / 12.1
Palm Thickness: 0.52mm ± 0.05mm					
Tolerance (length) " ± 10mm					

PERFORMANCE PROPERTIES

EN388: 1020						
ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5

BARCODES

ITEM	BAG	DOZEN	CASE
48-L212Y/XS	---	01616314038259	02616314038259
48-L212Y/S	---	01616314034701	02616314034701
48-L212Y/M	---	01616314034695	02616314034695
48-L212Y/L	---	01616314034688	02616314034688
48-L212Y/XL	---	01616314034718	02616314034718

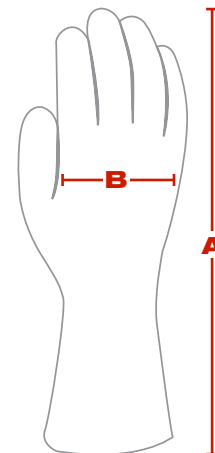

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU[®]

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.