

Water Mist Nozzle Model 122

Technical Data

Installation: Pendent
Spacing: 2.5m - maximum room height 2.5m
Spacing: 3.0m - room height above 2.5m
Nozzle Pressure: minimum 3.8 bar
Nozzle Pressure: maximum 12 bar
RTI-value: <50
Extinguishing liquid: Water 100%
Droplet size: $D_{v0,9} = 550 \mu\text{m}$
K - factor: 5.7


Product Numbers:

68°C - 12201
93°C - 12203
141°C - 12204

Tested in accordance with:
IOM Red 800. UL 2167

Product Description

Rapidrop model 122 glass bulb nozzles are used part of a low pressure water mist system in general fire protection of buildings.

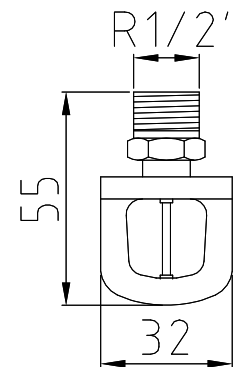

Rapidrop Global

Rutland Business Park Newark Road Peterborough, PE1 5WA, United Kingdom
Tel: +44 (0) 1733 847 510 Fax: +44 (0) 1733 553 958
e-mail: rapidrop@rapidrop.com web: www.rapidrop.com