


## PIV300 Non Rising Stem Resilient Wedge

## Gate Valve

UL Listed / FM Approved

Flange x Flange

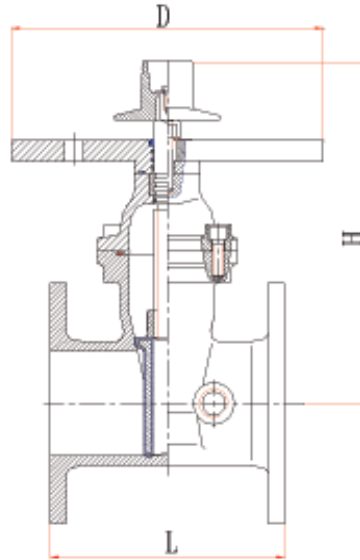

### Valve Standard

Comply with AWWA C515

### Pressure & Rating

Working Pressure: 20.7 Bar

Temperature: -10 °C to 120 °C

**Flange Ends:** EN1092-2 PN10 / PN16, ANSI B16.1 Class 125. (Please specify on order).

**Fusion Bonded Epoxy Coated Interior and Exterior**

### Dimensions

Size	100 mm	125 mm	150 mm	200 mm	250 mm	300 mm
L	229	254	267	292	330	356
H	350	410	455	545	645	730
D	305	305	305	305	305	305

### Material Specifications

Item	Material	ASTM Spec
NPT Plug	Brass	B16, C36000
Post Plate	Ductile Iron	A536 65-45-12
Wrench Nut	Ductile Iron	A536 65-45-12
Gland	Ductile Iron	A536 65-45-12
Thrust Collar	Bronze	ASTM B62
Bonnet	Ductile Iron	A536 65-45-12
Gasket	EPDM	Commercial
Stem	Stainless Steel	AISI 420
Disc Nut	Bronze	ASTM B62
Wedge Disc	Ductile Iron with EPDM Coated	
Body	Ductile Iron	A536 65-45-12
Bolts & Nut	Stainless Steel	

### Rapidrop Global

Rutland Business Park, Newark Road, Peterborough, PE1 5WA, United Kingdom

Tel: +44 (0) 1733 847 510 Fax: +44 (0) 1733 553 958

e-mail: [rapidrop@rapidrop.com](mailto:rapidrop@rapidrop.com) web: [www.rapidrop.com](http://www.rapidrop.com)