

# Side Mount Cart Handle

602328

## New Product Announcement

### DESCRIPTION

Our new Side Mount Carts offer another means of portable reeling. A simplistic design makes them lighter and more easily maneuverable. The square tubular steel frame resists deformation, even through heavy use and the baked-on powder coat guards against the elements. The cart, designed to be used with Reelcraft's 6 and 12 inch 30,000 Series reels, features a Zinc-plated 1/2" steel axle and 8" semi-pneumatic tires.

### BENEFITS

- **Lightweight** Square tubular steel is lighter and still provides excellent strength and rigidity under normal use.
- **Superior Corrosion-Resistance** Painted components are powder coated prior to assembly to ensure universal coverage and maximum resistance to corrosion.
- **Easily Operated** Oversized 8" wheels enhance maneuverability and open design allows easy access to serviceable parts on the reel itself.

### RELATED PRODUCTS

Reelcraft offers a full line of over 2,500 hose, cord and cable reels. For more information on this, or any other hose reel cart package, call or visit us on the Web at [www.reelcraft.com](http://www.reelcraft.com).

NOTE: Cart comes with all fasteners needed to assemble. Also included, are bumpers (front & rear) for front mounting slots on 30,000 Series reel (reel sold separately).



602328 shown partially assembled.  
NOT SHOWN: scuff bumpers & fasteners.



### SPECIFICATIONS

MODEL (Handle Only)	HEIGHT	WIDTH	LENGTH	SHIPPING WEIGHT
	in / mm	in / mm	in / mm	lbs / kg
602328	42 1067	8 203	19.25 489	14 7

All prices subject to change, effective July 1, 2008. Dimensions are for cart assembled.

### SPECIFICATIONS

- ✓ Zinc - plated 1/2" dia. axle
- ✓ Corrosion-resistant powder coating
- ✓ 8" semi-pneumatic tires
- ✓ Made from 1" square tubing
- ✓ Hose clip
- ✓ Fasteners and scuff bumpers included
- ✓ Fits most hand crank 30,000 series reels (6" and 12" models)
- ✓ Lightweight



SIDE MOUNT CART HANDLE / 602328

North America: 800-444-3134  
Europe: +44 (0) 1536 406999  
Pacific Rim: +63-45-599-3721  
China: (519) 8512 2391  
Latin America: 002-60-489-1685

**Reelcraft Industries, Inc.**  
One Reelcraft Center / P.O. Box 248  
Columbia City, IN 46725  
FAX: 260-248-2605

[www.reelcraft.com](http://www.reelcraft.com)

Reelcraft Industries is  
**ISO 9001:2000**  
Certified Since 1996

 **REELCRAFT**

*Wind Things Up With Reelcraft™*

# 6" and 12" Reels

Series 30,000

## Product Announcement

### DESCRIPTION

The Series 30,000 is designed for rugged, heavy duty applications and features a large storage capacity. The 602328 Side Mount Cart was specifically designed to be compatible with 30,000 Series 6" and 12" models. The cart and reel, as a package, offer a convenient and easily maneuverable option to store and transport long lengths of hose. Other reels not listed may be compatible. Consult manufacturer for more details.



Model Shown: CA32112 L

### HOSE REELS


MODEL (without hose)	HOSE I.D.		LENGTH		PRESSURE		NOTES	WEIGHT	
	in / mm	ft / m	ft / m	psi / bar	psi / bar	lbs / kg			
CA32106 L	1/2	13	100	31	1000	69	Air/Water	42	19
CA32112 L	1/2	13	200	61	1000	69	Air/Water	49	22
CA33106 L	3/4	19	50	16	1000	69	Air/Water	42	19
CA33112 L	3/4	19	100	31	1000	69	Air/Water	49	22
CA38106 M*	3/8	10	140	43	3000	207	Pressure Wash	44	20
CA38112 M*	3/8	10	300	91	3000	207	Pressure Wash	49	23

\*Features a Super Swivel® for pressure wash. Maximum operating temperature 250°F (121°C)

### CABLE STORAGE REELS

MODEL (without cable)	CABLE DESCRIPTION				O.D.		LENGTH		WEIGHT	
	AWG / mm <sup>2</sup>	Cond.	Type	in / mm	ft / m	ft / m	lbs / kg			
CA30106-CS	10	5.37	3	SOOW	.643	17	225	69	40	19
	12	3.32	3	SEOOW	.591	15	270	82		
	12	3.32	3	SJEOOW	.433	11	515	157		
	16	1.33	3	SJTO	.341	9	845	258		
CA30112-CS	10	5.37	3	SOOW	.643	17	455	138	46	21
	12	3.32	3	SEOOW	.591	15	545	166		
	12	3.32	3	SJEOOW	.433	11	1030	314		
	16	1.33	3	SJTO	.341	9	1695	517		


Power source must be disconnected while reeling/dereeling. For cable sizes up to .969" O.D.

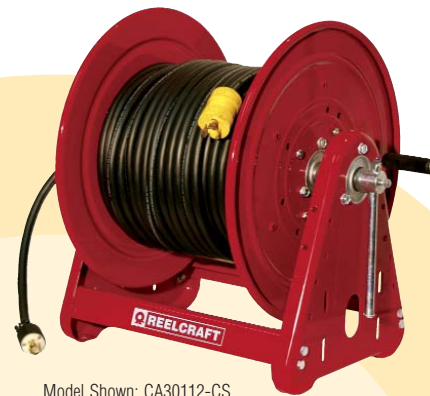

Model Shown: CA30112-CS

### TWIN WELDING HOSE REELS

MODEL (without hose)	I.D.		LENGTH		PRESSURE		NOTES	WEIGHT	
	in / mm	ft / m	ft / m	psi / bar	psi / bar	lbs / kg			
BA36106 L	1/4	6	125	38	200	14	Bevel Crank	50	22
BA36112 L	1/4	6	250	76	200	14	Bevel Crank	57	25
BA36106 LT	1/4	6	125	38	200	14	Bevel Crank, T-Grade	50	22
BA36112 LT	1/4	6	250	76	200	14	Bevel Crank, T-Grade	57	25

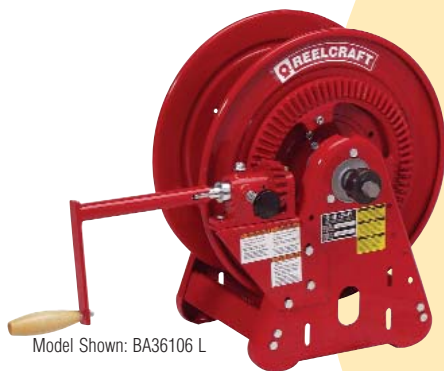

Model Shown: BA36106 L

### SPECIFICATIONS

- ✓ Adjustable spool rotation drag
- ✓ Permanently lubricated dual main bearings
- ✓ All bolted construction
- ✓ Vibration-proof self-locking fasteners

North America: 800-444-3134

Europe: +44 (0) 1536 406999

Pacific Rim: +63-45-599-3721

China: (519) 8512 2391

Latin America: 002-60-489-1685

**Reelcraft Industries, Inc.**

One Reelcraft Center / P.O. Box 248

Columbia City, IN 46725

FAX: 260-248-2605

www.**reelcraft**.com

Reelcraft Industries is

**ISO 9001:2000**

Certified Since 1996

**REELCRAFT**

Wind Things Up With Reelcraft™

6" AND 12" REELS / SERIES 30,000