

# SFFECO

## HYDRANTS & CABINETS



المصنع السعودي لأجهزة الإطفاء  
SAUDI FACTORY FOR FIRE EQUIPMENT

DECADES  
EXCELLENCE

## **WET TYPE FIRE HYDRANT**



Wet Fire Hydrant is used in places where there is no danger of vehicle accidents or freezing atmospheres. It is better to be used in malls, shopping centers, colleges, hospitals etc.

### **TECHNICAL FEATURES:**

The hydrant material is cast iron. The entire hydrant is made by casting.

The 4" shell hydrant is made according to BS750 standard.

Two numbers of 2½" hydrant landing valves with cap and chain are provided with the hydrants.

The valves are of NST threads and normally PN20 rating.

(Other pressure ratings are available upon request).

## **PILLAR DRY TYPE FIRE HYDRANTS**



DRY BARREL DESIGN eliminates damage to the Hydrant caused by freezing or corrosion of the upper part.


BREAK AWAY DESIGN to prevent accidents to the Hydrants, where only the upper part of the Flange will be broken upon impact .

Designed as per AWWA C502, which applies for the wall thickness, loss of head and hose connection plugs.

Simple rugged construction and easy to maintain.

Ductile Hydrants available upon request.

# PILLAR DRY TYPE FIRE HYDRANTS SPECIFICATION

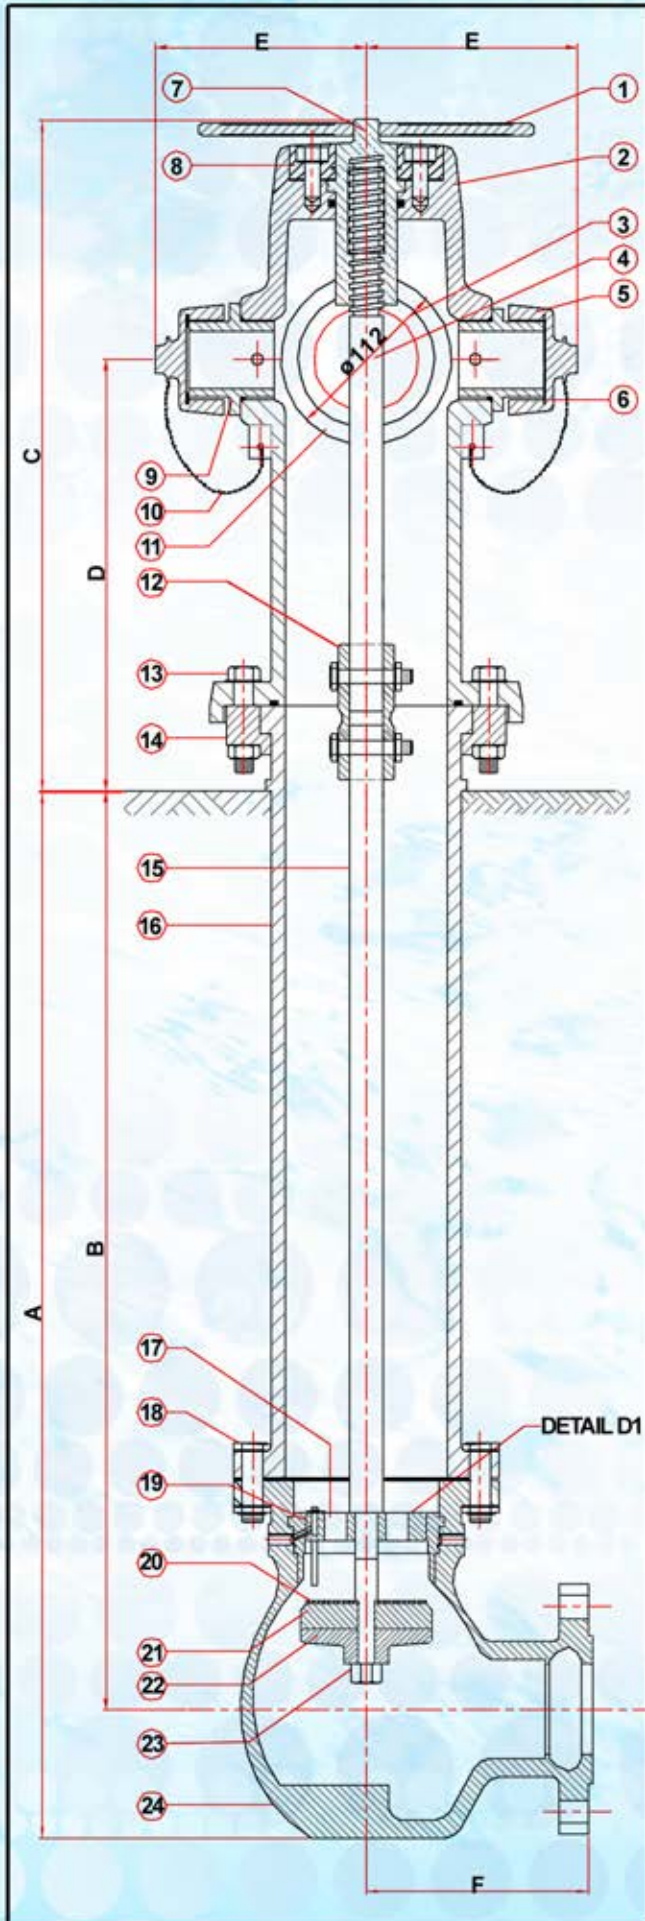

Model	A	B	C	D	E	F
100 SFH-800	895	800	610	400	200	190
100 SFH-1200	1295	1200	710	400	200	190
100 SFH-1500	1595	1500	710	400	200	190
150 SFH-800	895	800	690	470	220	240
150 SFH-1200	1295	1200	690	470	220	240
150 SFH-1500	1595	1500	690	470	220	240

Note:

☞ All Dimensions in mm.

☞ Tolerance  $\pm 10$  mm.

116mm $\varnothing$

158mm $\varnothing$



D1

Item	Qty.	Item	Material
1	1	Handle	Gray casting
2	1	Body	Grey casting
3	1	Plummer coupling cap	Grey casting
4	1	Upper stem	Mild Steel
5	2	Coupling cap	Gery casting
6	2	Coupling gasket	3 THK Buna synthetic rubber
7	1	Operating unit	Gun metal
8	1	Cover	Gun metal
9	2	Coupling nipple	Gun metal 2 1/2" NST
10	2	Coupling cap chain	M.S
11	1	Plummer coupling	Gun metal
12	1	Stem coupling	Grey casting
13	8	Claw bolt	Steel (M16 x 80 L.G)
14	9	Claw	Grey casting
15	1	Lower stem	Mild Steel
16	1	Spool or reel (Stand pipe)	Grey casting
17	1	Valve plate	Gun metal
18	8	Bottom bolt & nut	M16 x 70 LG. (HEX.) (Mild Steel)
19	1	Drain valve	Gun metal
20	1	Retainer plate	M.S
21	1	Rubber valve	Synthetic rubber
22	1	Bottom plate	Gray casting
23	1	Nut	M.S
24	1	Elbow	Grey casting

Option: Inner Parts can be stainless steel upon request

## HYDRANT CABINETS



**SHC/750 SERIES**



**SHC/800 SERIES**

MODEL	Length	Width	Depth	Height of legs
SHC/750 Series	1000 mm	800 mm	250 mm	600 mm
SHC/800 Series	1500 mm	800 mm	250 mm	100 mm

### STANDARD EQUIPMENT

- 2 pcs-Fire Hose Size 2.5"x100feet synthetic rubber lined with Aluminum coupling.
- 2 pcs-Hose Nozzle 2.5 NST Thread
- 1 pc-Adjustable Hydrant Wrench
- 1 pc-Pin Lug Spanner Wrench
- Fire Axe
- 4 pcs-2.5" Rubber Gasket for Hose Couplings

### OTHER ACCESSORIES ARE AVAILABLE UPON REQUEST

- Extra Fire hose 2.5" or 1.5". Double jacket Hoses.
- Crow Bar
- 2.5" Underwriters Play Pipe
- Flashing Light
- Torch

### DESIGN CABINET:

- Cabinet doors are made of 1.2 mm steel sheet with no sharp edges.
- Corrosion Protection-cabinets are painted with Electrostatic Powder Paint oven baked to protect against rust.
- Cabinet is designed to be weather-proof.
- All instructions are silk-screened on the Cabinet. No sticker.
- Other special series or equipments are available upon request.

In line with our policy of continuous product improvement, we reserve the right to modify specifications without prior notice.

# The Leading Manufacturer of Fire Protection Equipment

# ...SFFECO

#### Factory & Head Office - Riyadh

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA  
 Wasel: 7275, Code: 14334, Addition Number: 4441  
 Tel : +966 11 2650070, Fax: +966 11 2652190  
 E-mail: riadh@sffeco.com.sa

#### SFFECO GLOBAL Office

JAFZA (South), Dubai, UAE, P.O. Box 261318  
 Tel: +971 4 880 9890, Fax: +971 4 880 9822  
 E-mail: sales@sffecoglobal.com

#### Jeddah Branch

Tel : +966 12 670 6009, Fax: +966 12 676 0307  
 E-mail: jeddah@sffeco.com.sa

#### Dammam Branch

Tel : +966 13 8351961, Fax: +966 13 8351968  
 E-mail: dammam@sffeco.com.sa

#### Madinah Branch

Tel : 0148660959, 0148283256, Fax: 0148660969  
 E-mail: madinah@sffeco.com.sa

[www.SFFECO.com](http://www.SFFECO.com)



**DECADES**  
*of*  
**EXCELLENCE**