



**FOAM**

**FIRE EXTINGUISHER**

- 1. PULL OUT SAFETY PIN
- 2. AIM THE JET TO FIRE BASE
- 3. SQUEEZE THE LEVER

**CAUTION: DO NOT USE ON ELECTRICAL FIRE**

**SPECO**

CE 0086



SAFETY FACTORY FOR FIRE EQUIPMENT CO.



# Foam

## Extinguishers

Model	A	B	C	D	F
FX 6	21A	144 B			
FX 9	21A	183 B			
FX6MAX	34A	233 B			



### Product description

SSFECO foam extinguishers are multi-purpose, ideal for fires involving volatile liquids and freely burning materials such as paper, cloth, wood and furniture.

Suitable for Class A and Class B fire risk


**Note:** Foam extinguishers are not suitable for fires involving electrical risk.

### Features:

- AFFF Synthetic Aqueous Film – Forming Foam Agent capable of fighting class A, B Fire
- Kite Mark Certified to BS EN 3
- High Quality Polyester Powder Coated Paint
- Thermoplastic Internal Coating to prevent corrosion
- Spray Nozzle to provide high Fire Rating
- Controlled Discharge
- Brass Nickel Plated head valve with simple squeeze operation.
- Unique gauge testing system
- Unique colour code handle & Base (Optional)
- Rechargeable & Easy to Service.

**Ideal Use:** Petrol Stations, Restaurants, etc.

**Caution:**  
**Don't use on Electrical Fire.**

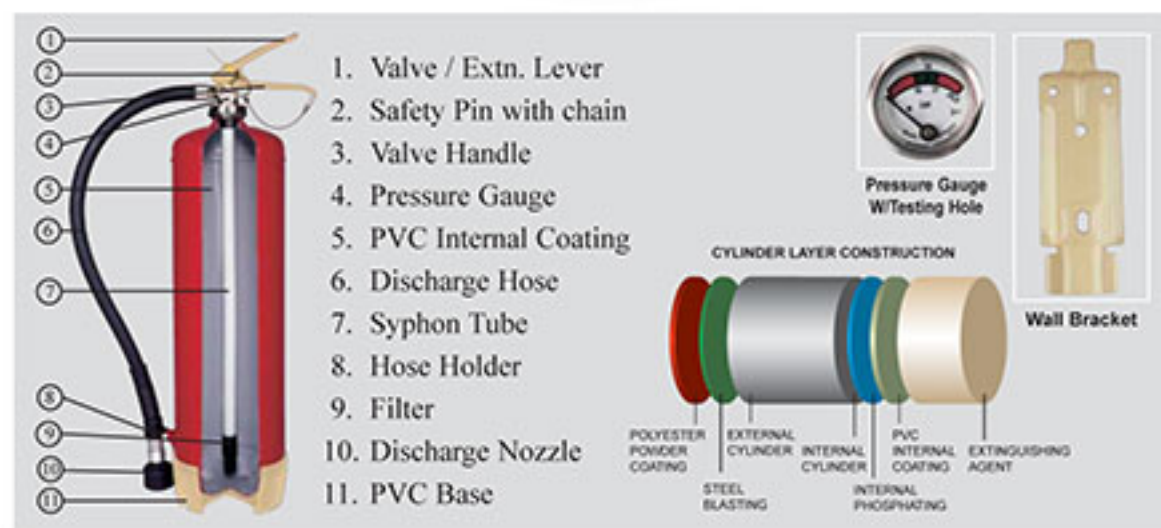

MODEL	FX6	FX9
Capacity	6 L	9 L
Fire Rating	21A 144B	21A 183B
Average discharge time	22 Sec.	30 Sec.
Height	625 mm	635 mm
Diameter	150 mm	185 mm
Filled weight	11.2 kg.	15.5 kg.
Empty weight	5.2 kg.	6.5 kg.
Operating temperature	+5°C to +60°C	+5°C to +60°C
Working Pressure at 20°C	14 bar	14 bar
Maximum Service Pressure	15.8 bar	15.6 bar
Test Pressure	30 bar	30 bar

