



Advanced Multi-Criteria Fire Detector with four unique sensing elements

This latest addition to the System Sensor 200 Series combines four complementary technologies into one device to convey accurate fire sensing information for locations where absolute certainty is required.

Features

- Unique ability to detect all four major elements of a fire
- Highest nuisance alarm immunity
- Advanced algorithms interpret and respond to the multiple inputs
- Six levels of sensitivity
- CO sensing for fastest response to slow-developing, smoldering fires
- Fully integrated infrared sensing to support the fire alarm decision
- Automatic drift compensation of smoke sensor and CO cell
- Superior EMI protection
- Twin LED indicators providing 360° visibility
- LEDs can be panel controlled to blink, latch on, latch off
- Built-in test switch



This plug-in fire detector combines four separate sensing elements in one unit: 1. photoelectric chamber senses airborne particulate for smoke detection, 2. electrochemical cell technology monitors carbon monoxide (CO) produced by smoldering fires, 3. infrared (IR) sensing measures ambient light levels and flame signatures, and 4. thermal detection monitors temperature.

The integration of continual monitoring for all four major elements of a fire has enabled System Sensor to create a detector that responds more quickly to an actual fire with the highest immunity to nuisances. This advanced multi-criteria detector normally operates at a high immunity level and changes to become very sensitive to fires as soon as fire characteristics are sensed. In this way, nuisances are monitored and ignored, reducing false alarms.

The detector's onboard intelligence runs advanced algorithms that dynamically adjust detection parameters to respond to the inputs from the sensors, enabling instant response as ambient conditions change. The program changes sensor thresholds, sensor gain, time, delays, combinations, sampling rates and averaging rates. If any sensor fails, the detector automatically adjusts the sensitivity of the remaining sensors. It also recognizes a fault condition.

The CO sensing cell has an expected lifetime of approximately six years. The CO cell is not a field-replaceable component. An internal timer signals the control panel to indicate the approach of the CO cell's end of life. Upon expiration, you should contact the system supplier to arrange for replacement of the unit. However, detection is not compromised when the CO cell is expired. The algorithms automatically adjust to properly weight the inputs from the photoelectric, heat and IR sensors.

The IR light sensor recognizes specific situations, such as welding, and makes adjustments rapidly to further reduce the potential for nuisance alarms. The thermal detection function fuses thermistor technology with a software-corrected, linear temperature response to offer exceptional nuisance alarm immunity and excellent fire detection.

Agency Listings



S911



CS308



3030459



7272-1653:0208




2203

NOTE: The CO cell is specifically deployed as a component of smoke detection in this device. This device is not listed for applications in which standalone CO detection is required for life safety.

2251-COPTIR Specifications

Physical Specifications

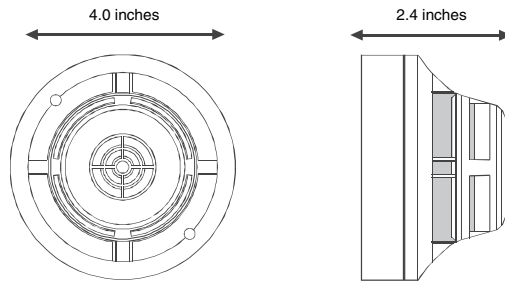

Height	2.7" installed in B210LP base or B501 base
Diameter	6.0" installed in B210LP base; 4.0" installed in B501 base
Shipping Weight	4.6 oz
Color	Ivory
Material	Bayblend FR110
Operating Humidity Range	10 to 93% relative humidity (non-condensing)
Application Temperature Range	32°F to 100°F (0°C to 38°C)
Air Velocity	0 to 4000 ft/min (0 to 20 m/sec)

Electrical Specifications

Operating Voltage Range	15 to 32 VDC
Maximum Standby Current	300 μ A at 24 VDC (one communication every 5 seconds with LED blink enabled)
Maximum Alarm Current (LED on)	7mA at 24 VDC

Sensitivity Settings and Suggested Applications

Level 1	1% / ft of smoke	Very clean environments – laboratories
Level 2	2% / ft of smoke	Clean environments – offices
Level 3	3% / ft of smoke	Moderately clean environments – hotel rooms, dorm rooms
Level 4	3% / ft of smoke with different algorithm processing and weighting of sensor elements	Hotel rooms near a shower, boiler rooms
Level 5	4% / ft of smoke	Equipment rooms, kitchens, paint shops
Level 6	Thermal alarm at 135°F (57°C)	
*Once the CO cell has reached the end of life and enters Photo, Thermal, Infrared (PTIR) mode, the following sensitivities apply:		
Level 1	1% / ft of smoke	Very clean environments – laboratories
Level 2	2% / ft of smoke	Clean environments – offices
Level 5	3% / ft of smoke	Moderately clean environments – hotel rooms, dorm rooms
Level 6	Thermal alarm at 135°F (57°C)	

Ordering Information

Part No.	Description
2251-COPTIR(A)*	Advanced Multi-Criteria Fire Detector
Bases	
B501(A)	4" Flangeless Mounting Base
B501BP(A)	4" Flangeless Mounting Base Bulk Pack
B210LP(A)	6" Flanged Mounting Base
B210LPBP	6" Flanged Mounting Base Bulk Pack
B200SR(A)	Standard Sounder Base (Compatible with B501BH Series)
B200S(A)	Intelligent Addressable Sounder Base
B224RB(A)	Relay Base
B224BI(A)	Isolator Base
Accessories	
SMB600	Surface Mounting Kit (flanged)
F110	Accessory Flange Ring for 6" Base
F110BP	Accessory Flange Ring for 6" Base Bulk Pack
F210	Accessory New Smaller Flange Ring for 6" Base
RA100Z(A)	Remote LED Annunciator
M02-04-01	Detector Test Magnet
M02-09-00	Telescoping Test Magnet

*(A) suffix denotes Canadian Product



3825 Ohio Avenue • St. Charles, IL 60174
 Phone: 800-SENSOR2 • Fax: 630-377-6495
 www.systemsensor.com

©2012 System Sensor.
 Product specifications subject to change without notice. Visit systemsensor.com
 for current product information, including the latest version of this data sheet.
 CMDS00700 • 1/12