


# EF1 RC MONITOR

## BIG IDEAS IN A SMALL PACKAGE



EF1 RC with Bubble Cup Nozzle  
Y1-E32A Monitor with FS2095BCER

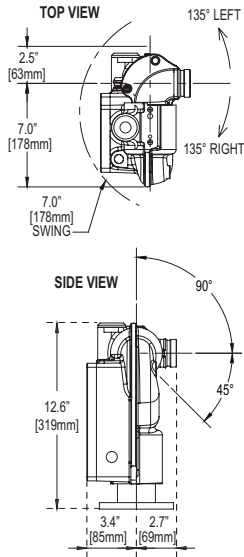

The EF1 remote controlled monitor is TFT's most compact monitor, yet has a large 1-1/2" (38mm) waterway and is capable of flowing from 10 gpm (37 l/min) to 200 gpm (757 l/min). With Bluetooth® controller options, one plug connection, and integrated nozzle shutoff, there are lots of big ideas in this small package.

### Easy Installation



Wiring is reduced to a minimum and installs easily with a one-plug connection. Using the Bluetooth® controller, running wires through the chassis firewall is no longer necessary. Installation is simplified for new builds or even retrofits.

### Off Road Ready



Built to withstand rugged off-road conditions, the monitor is hard coat anodized and powder coated inside and out. The electric drives and control interface are in a completely sealed, low profile box that is both water and dust proof.

### Compact Wildland Attack



TFT's most compact monitor at 12.6" (319mm) high and 6.1" (155mm) deep. A perfect match for wildland and interface apparatus. Minimized wiring and slim line profile help prevent snags on trees and brush and allows for an easy installation even with brush guards.

# NOZZLE OPTIONS FOR THE EF1 RC MONITOR

## SMOOTH BORE



Smooth Bore Tips—  
5/8" for 80 gpm (302 l/min)  
or 1" for 200 gpm (757 l/min)  
Good for CAFS Applications

Y1-E32A Monitor with FSS Nozzle

## SELECTABLE



100 psi Selectable ER Tip  
Flow Capacity that ranges  
from 15 to 120 gpm  
(56 to 454 l/min)

Y1-E32A Monitor with B-TOS-ERP

## ULTIMATIC



75, 100, 120 or 150 psi  
Automatic Tip  
Flow Capacities that range  
from 10 to 125 gpm  
(37 to 473 l/min)

Y1-E32A Monitor with B-TO-ERP

## BUBBLE CUP



100 psi Dual Gallonage Tip  
Flow Capacities at  
20/60 gpm (75/227 l/min)  
or 20/95 gpm (75/360 l/min)  
Integrated Aspirated Foam Sleeve  
Integrated Nozzle Shut Off

Y1-E32A Monitor with FS2095BCER

# RC CONTROLLER OPTIONS

### BLUETOOTH®



YE-RF-BT  
Tactile Touch  
Screen Controller



YE-BT1  
Bluetooth®  
Adapter



### PUMP PANEL



Y4E-RP-D  
Panel Mount  
Monitor Operator  
Station with  
Display

### HANDHELD W/30 FT TETHER

Y4E-CT-30-D  
Tethered Monitor  
Operator Station  
with Display



### JOYSTICK IN THE CAB



Joystick Monitor Operator Station  
with Valve Control. Available  
in a Gateable (Y4E-JS-GT) or  
Non-Gateable Version (Y4E-JS-52)



Heavy Duty 2"  
Stainless Steel Water  
Valve and Interface Box:  
Gateable Version (YE-VKG PH) or  
Non-Gateable Version (YE-VK-PH)